



PISCINE ET BIEN-ÊTRE

Équipements de piscine, aquafitness et sauna

CATALOGUE 2025-2026

HFS GROUP

POOL OPTIONS

Everything you need for a high performance, environmentally friendly and fully connected equipment room.

HEATING

FILTRATION

TREATMENT

① Heating

② Filtration

③ Treatment

OUR TOP PICKS



P. 20

Jet PRO

ULTRA HIGH PERFORMANCE
NF CERTIFIED HEAT PUMP



P. 56

Aqualyser

INTELLIGENT SALT CHLORINATOR



P. 62

ICE SPA

OUTSTANDING SPA HEATING



P. 100

Poolican® NEW EDITION


ALL-IN-ONE POOL EQUIPMENT

A CONNECTED AND INTELLIGENT SWIMMING POOL



WiFi-Link WIFI ANTENNA & OUTDOOR 4G ROUTER

WiFi-Link lets you connect up to 25 devices to the internet within a 50m radius of the pool.



P. 36



OUR DEDICATED POOLEX APP

Compatible with all connected Poolex devices, it's easy to install, intuitive to use and lets customers remotely monitor their device.

Available on



App Store



Google Play



POOLEX CLOUD

CENTRALISED INTELLIGENCE FOR EVERYONE'S BENEFIT

Remote diagnostics & set up

- ➡ Check and change settings remotely
- ➡ Identify faults
- ➡ Avoid unnecessary call-outs
- ➡ Reduce downtime for connected products
- ➡ Get proactive

Manage water and data

- ➡ Check the status of connected devices
- ➡ Analyse water quality
- ➡ Analyse usage and needs
- ➡ Support R&D for innovation and continuous improvement

RESIDENTIAL
POOL



CONSIDER A THERMAL ANALYSIS



The water volumes specified for our heat pumps are maximum estimates under optimum conditions. Accurate thermal analysis is essential to determine the appropriate sizing for each installation.



	JET PRO	JET CITY	JET MAX	VERTIGO FI
Swimming pool type	In-ground	In-ground	In-ground + Communal	In-ground + Communal
Pool volume	< 135 m ³	< 40 m ³	< 185 m ³	< 250 m ³
SCOP	A	A	A	A
Full Inverter technology	✓	✓	✓	✓
EVI technology	-	✓	-	-
Ventilation				
Reversible	✓	✓	✓	✓
WiFi connection Remote control	✓	✓	✓	✓
Cloud access	✓	✓	✓	✓
OTA (Over-the-air) Remote software upgrades	-	✓	✓	-
Smart Grid Ready	✓	-	-	-
Operates down to	-20°C	-25°C	-20°C	-10°C
Silent Mode	✓	-	✓	✓
Automatic de-icing	✓	✓	✓	✓
Refrigerant type	R32	R32	R32	R32
Warranty	5 years	5 years	5 years	5 years

*In extreme conditions, the heat pump maintains the temperature of the water. Ensure correct sizing by performing a thermal analysis.

COMMUNITY
POOL



	SILENT JET FI	ARCTICLINE R290	MEGALINE FI
Swimming pool type	In-ground	In-ground	Communal
Pool volume	< 150 m ³	< 100 m ³	Unlimited (heat pumps can be connected in series)
SCOP	-	-	A
Full Inverter technology	✓	✓	✓
EVI technology	-	✓	-
Ventilation			
Reversible	✓	✓	✓
WiFi connection Remote control	✓	✓	✓
Cloud access	-	✓	-
OTA (Over-the-air) Remote software upgrades	-	✓	-
Smart Grid Ready	-	-	-
Operates down to	-7°C	-25°C	-10°C
Silent Mode	✓	✓	✓
Automatic de-icing	✓	✓	✓
Refrigerant type	R32	R290	R32
Warranty	3 years	5 years	3 years

POOLEX TECHNOLOGIES

At Poolex, the demand for performance is at the heart of each and every innovation. Our solutions combine advanced technology, energy efficiency and sustainability to meet the highest expectations. Equipment designed to offer your customers reliability, control and longevity, day after day.



WHAT IS SCOP?

SCOP (Seasonal Coefficient Of Performance) is an essential energy efficiency indicator for a heat pump or filter pump. It evaluates performance over the course of an entire season, from May 1st to September 30th.

Unlike COP (Coefficient Of Performance), which measures efficiency at a specific point in time under ideal conditions, SCOP incorporates variations in outdoor temperature and operating cycles over an extended period of time. It is based on three temperature references ranges: 7°C, 15°C and 26°C.

PREMIUM QUALITY

NEW WARRANTIES
PROFESSIONAL RANGE

5 YEARS
on all components

7 YEARS
compressor

15 YEARS
titanium coil

The heat pumps specifications in this document are provided for information purposes only and are subject to change without notice in order to improve product quality and performance. They are the result of laboratory testing under controlled conditions and may vary depending on the actual conditions of use. Acoustic measurements were taken in a soundproof laboratory. As a result, the perceived sound level may differ from outdoor installations due to various environmental factors (reverberations, obstacles, weather conditions, etc.).

FULL INVERTER TECHNOLOGY

Full Inverter technology of Poolex heat pumps ensures maximum efficiency.

By automatically modulating its performance, it reduces energy consumption, provides continuous comfort and increases service life. The compressor adapts its output according to demand and the fan speed adjusts automatically.

UP TO
35%

ENERGY SAVINGS

compared to an on/off heat pump

Benefits

- **Energy savings:** the Full Inverter compressor limits peaks and reduces power consumption.
- **Quieter:** continuous and controlled operation.
- **More durable:** reduces wear associated with on/off cycles.



INNOVATIVE VENTILATION SYSTEMS





Class A Performance
SCOP >7

Operates from
-20°C to 43 °C

WiFi & Cloud

Ultra-quiet

ESS & Smart
Grid Ready

Modbus

The Jet Pro range is the **new gold standard in heat pumps**, combining **state-of-the-art technology**, ease of use, **superior quality** and a **commitment to the environment**. Designed for optimum performance, this range is packed with innovative technologies and delivers exceptional performance.

WARRANTIES

- **5 years:** all components
- **7 years:** compressor
- **15 years:** titanium coil

CLASS A
SCOP > 7
EN 17645

BY EUROVENT CERTITA CERTIFICATION
NF

NF certified heat pumps are guaranteed to comply with energy efficiency and sound level limits and are renewed every year. NF certified heat pumps benefit from superior quality construction.

STRATEGY:
NET ZERO

PRODUCTION

⊕ The manufacturing plant has SGS certification and is powered entirely by green, zero-carbon energy.

PRODUCT

⊕ Wherever possible, the product and its packaging use recycled plastic and recyclable materials.

		75	95	125	155	155 Tri	180	180 Tri
Product code: PC-JET		075	095	125	155	155T	180	180T
Pool volume	Northern Europe	30-40 m³	40-55 m³	50-70 m³	65-95 m³	65-95 m³	80-115 m³	80-115 m³
	Southern Europe	40-55 m³	50-70 m³	65-95 m³	80-115 m³	80-115 m³	110-135m³	110-135m³
SCOP		7.3	7	7.12	7.12	7.09	7.04	7.08
Air 26°C Water 26°C Humidity 80 %	Output power (kW)	2.9 ~ 10.3	2.9 ~ 12.8	3.8 ~ 16	3.8 ~ 18.7	3.8 ~ 18.7	3.8 ~ 21.8	3.8 ~ 21.8
	Power consumption (kW)	0.24 ~ 1.56	0.24 ~ 2.13	0.31 ~ 2.67	0.31 ~ 3.3	0.31 ~ 3.3	0.31 ~ 4	0.31 ~ 4
Air 15°C Water 26°C Humidity 70 %	COP	12.1 ~ 6.6	12.1 ~ 6.0	12.4 ~ 6.0	12.4 ~ 5.7	12.4 ~ 5.5	13.57 ~ 6.95	12.4 ~ 5.5
	Output power (kW)	1.9 ~ 7.3	1.9 ~ 9.3	3.5 ~ 12.8	3.5 ~ 15	3.5 ~ 15	3.5 ~ 17	3.5 ~ 17
	Power consumption (kW)	0.29 ~ 1.56	0.29 ~ 2.09	0.46 ~ 2.84	0.46 ~ 3.40	0.46 ~ 3.40	0.46 ~ 4	0.46 ~ 4
	COP	6.55 ~ 4.69	6.55 ~ 4.45	7.6 ~ 4.5	7.6 ~ 4.5	7.6 ~ 4.5	7.6 ~ 4.3	7.6 ~ 4.3
Power supply		Single-phase 220-240V ~50Hz				Three-phase 380-415V / 3N-50Hz	Single-phase 220-240V ~50Hz	Three-phase 380-415V / 3N-50Hz
Heating temperature range		15 °C ~ 40 °C						
Operating range*		-20 °C ~ 43 °C						
Max. output (kW)		2.2	2.6	4.2	4.2	4.2	5.3	5.3
Flow rate (m³/h)		3.1	3.9	6.9	6.9	8.3	6.9	8.3
Circuit breaker (A)		16		20		10	25	10
Cable supplied (10 m)		RO2V 3x2.5 mm²		RO2V 3x4 mm²		RO2V 5x2.5 mm²	RO2V 3x6 mm²	RO2V 5x2.5 mm²
Refrigerant		R32						
Packaging dimensions (mm)		1065 x 485 x 845						
Dimensions (mm)		988 x 365 x 712						
Net / gross weight (kg)		46/52		53/59				
Noise level at 1 m (db(A))		48	52	56	56	56	58	58
Noise level at 10 m (db(A))		28	32	36	36	36	38	38
Compressor		GMCC - Rotary						
Heat exchanger		Twisted Tech® Titanium						
Mode		Heating + Cooling: Boost / Smart (Silent) / Eco						
Pressure loss (mH2O)		0.5	0.7	2.2	2.2	2.2	2.8	2.8
Accessories		Included: PVC connectors Ø 50mm 1" ½ / Wired controller extension (10m) / Condensate drain hose Optional extra: Big Foot						

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.

NEW ARRIVALS

★ 2025

Exclusive offer
in stores

Jet CITY

SMALL YET

MIGHTY

CLASS A

SCOP > 7

EN 17645

Class A Performance
SCOP > 7

COP of 2 under
extreme conditions
(-10°C)

WiFi, Cloud
& OTA

Ultra compact
size

Ultra quiet

Jet City is the ideal **mini heat pump** for bathing all year round, even in the most extreme temperatures. Designed for pools up to **40m³**, it delivers performance comparable to larger models, yet remains **ultra quiet and compact**.

WARRANTIES

- **5 years:** all components
- **7 years:** compressor
- **15 years:** titanium coil

HIGH PERFORMANCE

thanks to

EVI TECHNOLOGY

By injecting additional vapour into the compressor at low temperatures, EVI (Enhanced Vapour Injection) improves the energy efficiency of refrigeration and air conditioning systems.

Extreme efficiency: COP of 2 at -10°C

-25°C

43°C

ULTRA QUIET

<28 DB

ULTRA COMPACT

Product code: PC-JETC		55
Pool volume	Northern Europe	055
	Southern Europe	< 25m³
SCOP		7.4
Air 26°C Water 26°C Humidity 80 %	Output power (kW)	3.3 ~ 7
	Power consumption (kW)	0.28 ~ 1.4
	COP	11.9 ~ 5
Air 15°C Water 26°C Humidity 70 %	Output power (kW)	2.3 ~ 5.4
	Power consumption (kW)	0.35 ~ 1.1
	COP	6.6 ~ 4.9
Air -10°C Water 26°C Humidity 70 %	Output power (kW)	2.6 ~ 3.35
	Power consumption (kW)	0.98 ~ 1.5
	COP	2.65 ~ 2.23
Air -15°C Water 26°C Humidity 70 %	Output power (kW)	3.2 ~ 3.7
	Power consumption (kW)	0.87 ~ 1.2
	COP	3.7 ~ 3
Power supply		Single-phase 220-240V-50Hz
Heating temperature range		15 °C ~ 43 °C
Cooling temperature range		5°C ~ 43°C
Operating range*		-25 °C ~ 43 °C
Max. output (kW)		1.7
Flow rate (m³/h)		3
Circuit breaker (A)		10
Cable supplied (10 m)		RO2V 3 x 2.5 mm²
Refrigerant		R32
Packaging dimensions (mm)		910 x 550 x 540
Dimensions (mm)		705 x 490 x 505
Net / gross weight (kg)		48 / 43
Noise level at 1 m (db(A))		45
Noise level at 10 m (db(A))		28
Compressor		GMCC - Rotary
Heat exchanger		Twisted Tech® Titanium
Mode		Heating + Cooling
Pressure loss (mH2O)		0.3
Accessories		Included: PVC connectors Ø 50mm 1" ½ / Hose clamps (2 sets) / Condensate drain hose / Winter storage cover. Optional extras: Colour touch screen + 10m cable to connect to the unit.

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.

NEW ARRIVALS
★ 2025



Jet MAX

ABSOLUTE POWER

FOR XL POOLS

CLASS A

SCOP > 8.5

EN 17645



Optimised Full Inverter technology with Class A SCOP > 8.5: High-performance and energy efficient, operating in temperatures ranging from -20°C to 43°C.

Smart connectivity: Control your heat pump remotely over Wi-Fi and with the Poolex app. Receive maintenance alerts for optimal monitoring via connection to the Poolex cloud and remote software upgrades thanks to OTA technology.

Premium design and durability: Galvanised steel front panel for a more stylish look.

Optimal acoustic comfort: Low noise level <30 dB thanks to its ergonomic design.

LED indicator: Easy to read operating status of the heat pump.



Class A Performance
SCOP >7



Operates from
-20°C to 43 °C



WiFi, Cloud
& OTA



Single-phase and
three-phase



Ultra-quiet

The Jet Max range is the perfect heat pump for modern large swimming pools. **Combining state-of-the-art technology**, ease of use and **superior quality**, it's ready to meet the highest demands. With a premium finish in **hot-dip galvanized steel**, Jet Max combines elegant aesthetics with **exceptional** durability.

WARRANTIES

- **5 years:** all components
- **7 years:** compressor
- **15 years:** titanium coil


		220	220T	280	280T
Product code: PC-JETM		220	220T	280	280T
Pool volume	Northern Europe	90-120m³	90-120m³	120-145m³	120-145m³
	Southern Europe	120-145m³	120-145m³	140-185m³	140-185m³
SCOP		8.76	8.68	8.55	8.52
Air 26°C Water 26°C Humidity 80 %	Output power (kW)	8.97 ~ 29.71	7.12 ~ 28.97	10.98 ~ 36.19	11.83 ~ 36.13
	Power consumption (kW)	0.63 ~ 4.82	0.58 ~ 4.66	0.78 ~ 6.17	0.84 ~ 6.17
	COP	14.36 ~ 6.16	12.28 ~ 6.22	14.08 ~ 5.87	14.08 ~ 5.86
Air 15°C Water 26°C Humidity 70 %	Output power (kW)	7.01 ~ 22.54	6.62 ~ 22.55	8.61 ~ 27.31	8.61 ~ 27.15
	Power consumption (kW)	0.85 ~ 4.43	0.84 ~ 4.37	1.05 ~ 5.65	1.07 ~ 5.62
	COP	5.09 ~ 8.25	5.16 ~ 7.88	4.83 ~ 8.20	4.83 ~ 8.05
Power supply		220-240V-50Hz	380-415V/3N-50Hz	220-240V-50Hz	380-415V/3N-50Hz
Heating temperature range		15 °C ~ 40 °C			
Operating range*		-20 °C ~ 43 °C			
Max. output (kW)		6.16	6.10	7.2	7.2
Flow rate (m³/h)		9.86	9.86	11.45	11.45
Circuit breaker (A)		40	16	40	16
Cable supplied (10 m)		RO2V 3x6 mm²	RO2V 5x2.5 mm²	RO2V 3x6 mm²	RO2V 5x2.5 mm²
Refrigerant		R32			
Packaging dimensions (mm)		1335 x 547 x 1106			
Dimensions (mm)		1288 x 505 x 955			
Net / gross weight (kg)		123/143		129/150	
Noise level at 1 m (db(A))		42-55	42-55	46-59	46-59
Noise level at 10 m (db(A))		30	30	32	32
Compressor		GMCC - Rotary			
Heat exchanger		Twisted Tech® Titanium			
Mode		Heating + Cooling: Boost / Smart (Silent) / Eco			
Pressure loss (mH2O)		3.3	3.3	3.7	3.7
Accessories		Included: Winter storage cover / Anti-vibration mounting kit / PVC connectors Ø 50mm 1" ½ / Wired controller extension (10m) / Condensate drain hose. Optional extra: Big Foot			

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.



Vertigo

THE GOLD STANDARD
IN VERTICAL
TECHNOLOGY



Vertigo Fi is **the gold standard** in vertically ventilated **heat pumps**. Its **innovative and compact design** makes it particularly suited to confined spaces. This latest generation has been redesigned to combine **performance, reliability and energy efficiency** with optimum acoustic comfort.

WARRANTIES

- **5 years:** all components
- **7 years:** compressor
- **15 years:** titanium coil



VERTICAL VENTILATION

- Ultra-quiet
- Saves floor space
- Allows use of space in front of the heat pump



		55	75	95	125	155	155T	200	200T	240	240T	300T
Product code: PC-VGO		055N2	075N2	095N2	255N2	155N2	155TN2	200N2	200TN2	240N2	240TN2	300TN2
Pool volume	Northern Europe	5-18m³	30-40m³	40-55m³	50-70m³	65-95m³	65-95m³	80-115m³	80-115m³	110-135m³	110-135m³	140-185m³
	Southern Europe	30-40m³	40-55m³	50-70m³	65-95m³	80-115m³	80-115m³	110-135m³	110-135m³	125-155m³	125-155m³	160-210m³
SCOP		7.3	7	7	7	7	7	7	7	7	7	7
Air 26°C Water 26°C Humidity 80 %	Output power (kW)	1.50 ~ 7.70	1.98 ~ 10.35	2.53 ~ 13.27	3.16 ~ 16.17	4.05 ~ 20.17	4.05 ~ 20.17	5.17 ~ 26.05	5.17 ~ 26.86	6.31 ~ 31.23	6.31 ~ 31.23	7.79 ~ 37.4
	Power consumption (kW)	0.10 ~ 1.13	0.13 ~ 1.50	0.167 ~ 1.93	0.206 ~ 2.7	0.267 ~ 3.33	0.267 ~ 3.33	0.37 ~ 4.17	0.37 ~ 4.17	0.41 ~ 4.92	0.41 ~ 4.92	0.51 ~ 6.03
	COP	15.31 ~ 6.84	15.35 ~ 6.87	15.15 ~ 6.84	15.34 ~ 6.0	15.17 ~ 6.07	15.17 ~ 6.07	14.86 ~ 6.43	14.86 ~ 6.43	15.32 ~ 6.76	15.35 ~ 6.78	15.36 ~ 6.75
Air 15°C Water 26°C Humidity 70 %	Output power (kW)	1.15 ~ 5.82	1.52 ~ 7.82	2.01 ~ 9.83	2.43 ~ 12	3.15 ~ 15.25	3.15 ~ 15.25	4.15 ~ 20.03	4.15 ~ 20.03	5.38 ~ 24.22	5.35 ~ 24.24	6.31 ~ 29.06
	Power consumption (kW)	0.16 ~ 1.18	0.20 ~ 1.58	0.26 ~ 2.00	0.323 ~ 2.65	0.418 ~ 3.24	0.418 ~ 3.24	0.56 ~ 4.42	0.56 ~ 4.42	0.72 ~ 5.00	0.70 ~ 4.99	0.84 ~ 5.97
	COP	7.52 ~ 4.93	7.60 ~ 4.95	7.61 ~ 4.92	7.52 ~ 4.53	7.54 ~ 4.72	7.54 ~ 4.72	7.35 ~ 4.52	7.35 ~ 4.52	7.55 ~ 4.84	7.55 ~ 4.84	7.52 ~ 4.81
Power supply		Single-phase 220-240V-50Hz					Three-phase 380-415V / 3N-50Hz	Single-phase 220-240V-50Hz	Three-phase 380-415V / 3N-50Hz	Single-phase 220-240V / 50Hz	Three-phase 380-415V / 3N-50Hz	
Heating temperature range		15 °C ~ 40 °C										
Operating range*		-10 °C ~ 43 °C										
Max. output (kW)		1.6	2	2.8	3.1	3.7	3.7	5.8	5.8	6.5	6.5	8.2
Flow rate (m³/h)		2.4	3.2	4.1	5.2	6.5	6.5	8.8	8.8	10.5	10.5	12.5
Circuit breaker (A)		10		16		25	10	32	16	32	16	
Cable supplied (10 m)		RO2V 3x2.5 mm²		RO2V 3x4 mm²		RO2V 3x6 mm²	RO2V 5x2.5 mm²	RO2V 3x10 mm²	RO2V 5x2.5 mm²	RO2V 3x10 mm²	RO2V 5x2.5 mm²	
Refrigerant		R32										
Package size (mm)		570x570x830			630x630x830			735x735x1120				
Dimensions (mm)		510x510x690			575x575x790			660x660x1030				
Net / gross weight (kg)		33 / 48	38 / 52	44 / 56	63 / 79	68 / 85	70 / 87	90 / 105	90 / 105	97 / 115	100 / 115	115 / 130
Noise level at 1 m (db(A))		36-45	38-46	38-46	41-50	42-52	42-52	47-56	48-57	48-57	48-57	49-59
Noise level at 10 m (db(A))		19-27	20-28	20-28	21-31	24-32	24-32	28-37	29-38	29-38	29-38	30-39
Compressor		GMCC - Rotary										
Heat exchanger		Twisted Tech® Titanium										
Mode		Heating + Cooling: Boost / Eco										
Pressure loss (mH2O)		1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
Accessories		Included: Anti-vibration mounting kit / PVC connectors Ø 50mm 1" ½ / Condensate drain hose. Optional extra: Big Foot										

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.



Silent Jet Fi

ULTRA QUIET, IT
KNOWS HOW TO
BLEND IN



Full Inverter technology

Rear ventilation

Ultra-quiet

WiFi

Operates from -7°C to 43 °C

The Silent Jet Fi's innovative **Full Inverter** technology **optimises energy** efficiency and **minimises noise**. By adjusting its power output depending on the temperature, it uses up to **35% less energy** than a traditional on/off pump. The compressor and fan rarely operate at full power, reducing noise levels, while the **rear-facing fan ensures the Silent Jet Fi remains discreet. Its high-performance and elegant design** allows it to blend seamlessly into any outdoor space.

WARRANTIES

- **3 years:** all components
- **7 years:** compressor
- **15 years:** titanium coil

REAR VENTILATION ULTRA QUIET

Say goodbye to cold air expelled towards the front thanks to **rear ventilation**. This solution **substantially decreases sound pressure** while retaining top-of-the-line performance. This architecture, combined with Full Inverter technology, makes this heat pump incredibly **silent**.

SLEEK & MODERN DESIGN



	60	90	120	160	160 T	210	210 3-PHASE
Product code: PC-SLT	060	090	120	160	160T	210	210T
Pool volume	Northern Europe	8-25m³	35-50m³	50-70m³	65-85m³	65-85m³	80-115m³
	Southern Europe	35-50m³	50-70m³	65-85m³	80-115m³	80-115m³	115-150m³
Air 26°C Water 26°C Humidity 80 %	Output power (kW)	2.46 ~ 7.8	2.2-12.5	2.4-15.5	3.3-21.5	3.3-22	4.3-27
	Power consumption (kW)	1.3-0.18	1.93-0.22	2.35-0.25	3.33-0.31	3.34-0.25	4.3-0.27
	COP	13.5-6.1	16.5-6.1	16.6-6.5	16.7-6.2	17.1-6.6	16.5-6.3
Air 15°C Water 26°C Humidity 70 %	Output power (kW)	1.4-6.1	1.6-9.05	1.9-11.5	2.48-16	2.6-16	3.2-20.5
	Power consumption (kW)	1.3-0.18	1.93-0.22	2.35-0.25	3.33-0.31	3.2-0.33	4.36-0.41
	COP	7.5-4.7	7.2-4.7	7.6-4.9	7.7-4.8	7.9-5.0	7.8-4.7
Power supply	Single-phase 220-240V-50Hz				Three-phase 380-415 V / 3N-50 Hz	Single-phase 220-240 V-50Hz	Three-phase 380-415 V / 3N-50 Hz
Heating temperature range	15-40 °C						
Cooling temperature range	8-28 °C						
Operating range*	-7-43 °C						
Max. output (kW)	1.7	2.6	3.2	4	4	5.3	5.3
Flow rate (m³/h)	2-4	4-6	5-7	7-9	7-9	9-11	9-11
Circuit breaker (A)	10	16	20		10	25	
Cable supplied (10 m)	RO2V 3x2.5 mm²			RO2V 3x4 mm²	RO2V 5x2.5 mm²	RO2V 3x6 mm²	RO2V 5x25 mm²
Refrigerant	R32						
Packaging dimensions (mm)	944x420x802	1043x440x802	1147x454x882		1279x484x972		
Dimensions (mm)	870x355x622	975x376x622	1040x406x722		1060x436x822		
Net / gross weight (kg)	46 / 52	56 / 63.5	69 / 77	73 / 81	89 / 98	92 / 100	92 / 100
Noise level at 1 m (db(A))	37-49	38-50	39-51	40-52	40-52	45-56	45-56
Noise level at 10 m (db(A))	19-28	19-29	20-30	21-31	21-31	23-35	23-35
Compressor type	Hermetic Rotary DC Inverter						
Compressor brand	GMCC						
Heat exchanger	Twisted Tech® Titanium						
Mode	Heating & Cooling (Eco / Silent / Boost) + Auto						
Pressure loss (mH2O)	1.1	1.1	1.1	1.1	1.1	1.1	1.1
Accessories	Included: Winter storage cover / Anti-vibration mounting kit / PVC connectors Ø 50mm 1" ½ / Condensate drain hose. Optional extra: Big Foot						

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.



Class A Performance
SCOP >7



Extreme conditions
COP of 2.8 at -10°C



R290 refrigerant



WiFi, Cloud
& OTA



Ultra-quiet

Designed to excel in **cold environments**, the Arcticline R290 heat pump embodies the perfect **alliance between R290 technology and EVI**. With its **Full Inverter** technology, which offers energy savings of up to 35% and its ability to maintain water temperature even in **extreme conditions**, this heat pump is revolutionising **the heating of swimming pools all year round in France and across most of Europe**.

WARRANTIES

- **5 years:** all components
- **7 years:** compressor
- **15 years:** titanium coil



This refrigerant is environmentally friendly and has a low impact on the climate as it does not contain any greenhouse gas emitters.

HIGH PERFORMANCE

thanks to

EVI TECHNOLOGY

By injecting additional vapour into the compressor at low temperatures, EVI (Enhanced Vapour Injection) improves the energy efficiency of refrigeration and air conditioning systems.

Extreme efficiency:
COP of 2 at -10°C



		12	16	16 TRI
Product code: PC-ARC		120	160	160T
Pool volume	Northern Europe	30-50m³	50-80m³	50-80m³
	Southern Europe	40-65m³	70-100m³	70-100m³
SCOP		7.78	7.53	7.53
Air 26°C Water 26°C Humidity 80 %	Output power (kW)	15.24-5.15	21.09-8.90	21.09-8.90
	Power consumption (kW)	2.47-0.41	3.25-0.80	3.25-0.80
	COP	6.17-12.56	6.49-11.32	6.49-11.32
Air 15°C Water 26°C Humidity 70 %	Output power (kW)	12.04-3.93	16.15-6.99	16.15-6.99
	Power consumption (kW)	2.38-0.51	3.16-0.93	3.16-0.93
	COP	5.06-7.71	7.52-5.11	7.52-5.11
Air 0°C Water 26°C Humidity 70 %	Output power (kW)	8.05	11.2	11.2
	Power consumption (kW)	2.29	3.14	3.14
	COP	3.52	3.56	3.56
Air -10°C Water 26°C Humidity 70 %	Output power (kW)	7.02	9.08	9.08
	Power consumption (kW)	2.47	3.5	3.5
	COP	2.84	2.6	2.6
Air 35°C Water 28°C Humidity 70 %	Output power (kW)	8.19-5.08	11.2-7	11.2-7
	Power consumption (kW)	2.97-1.13	4.6-1.5	4.6-1.5
	EER	2.76-4.5	2.45-4.7	2.45-4.7
Power supply		220-240V-50Hz		380-415V / 3N-50Hz
Refrigerant		R290		
Compressor brand		Toshiba		
HEAT exchanger		Twisted Tech® Titanium		
Connectivity		WiFi / Cloud Ready / OTA		

*Actual data may differ

NOT INCLUDED IN PRO RANGE

Megaline Fi


FULL INVERTER TECHNOLOGY
FOR XXL SWIMMING POOLS



		35	50	70	100
Product code: PC-MLP		353N	503N	703N	1003N
Pool volume		Contact our experts for a detailed analysis			
SCOP		8	8	7.87	7.91
Air 26°C Water 26°C Humidity 80 %	Output power (kW)	15.20 ~ 42.50	19.98 ~ 63.34	22.62 ~ 89.80	31.9 ~ 135
	Power consumption (kW)	7.34 ~ 1.55	10.72 ~ 1.53	13.58 ~ 1.42	19.3 ~ 2.3
	COP	11.43 ~ 5.79	13.06 ~ 5.91	15.93 ~ 6.61	13.59 ~ 6.98
Air 15°C Water 26°C Humidity 70 %	Output power (kW)	16.54 ~ 35	15.4 ~ 50	21.43 ~ 70	23.6 ~ 100
	Power consumption (kW)	6.99 ~ 1.55	9.92 ~ 1.91	13.65 ~ 3.05	20.0 ~ 3.1
	COP	7.46 ~ 4.80	7.93 ~ 4.76	7.65 ~ 5.05	7.58 ~ 4.99
Power supply		380-415V/3N-50Hz			
Heating temperature range		15 °C ~ 40 °C			
Cooling temperature range		8 °C ~ 28 °C			
Operating range*		-15 °C ~ 43 °C			
Max. output (kW)		9.5	13.46	20	29.8
Flow rate (m³/h)		15	20.5	35	40
Circuit breaker (A)		-	-	-	-
Cable supplied (10 m)		RO2V 5 × 4mm²	RO2V 5 × 6mm²	RO2V 5 × 10mm²	RO2V 5 × 16mm²
Refrigerant		R32			
Dimensions (mm)		1005×936×885	1105×1033×1090	1252×1075×2428	2148×1076×2176
Net weight (kg)		175	225	448	760
Noise level at 1 m (db(A))		≤65	≤66	≤70	≤73
Noise level at 10 m (db(A))		≤47	≤48	≤50	≤53
Compressor		Rotary Inverter			
Heat exchanger		Twisted Tech® Titanium			
Mode		Heating + Cooling: Boost / Smart (Silent) / Eco			
Pressure loss (mH2O)		0.5	0.6	4.2	4.8



Class A Performance
SCOP >7



Connect as many
as you need



WiFi



Three-phase
connection



Operates from
-15°C to 43 °C

Megaline Fi is the latest generation heat pump designed for XXL pools: communal pools, hotels, campsites, water parks, etc.

Thanks to its **powerful Full Inverter technology**, it adapts its power output to your needs, saving you energy and reducing noise levels. **Constructed from stainless steel** and **with a powder coated finish**, the Megaline Fi is a robust solution for the most demanding environments.

WARRANTIES

- **3 years:** all components
- **7 years:** compressor
- **15 years:** titanium coil

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.

ACCESSORIES

WiFi-Link

OUTDOOR WIFI ANTENNA OR 4G ROUTER



Wired connection or
4G Nano SIM card



Up to 25 devices



IP66 waterproof



Range up to
50 metres

WiFi-Link is a WiFi antenna or 4G router designed to **connect your pool equipment** in outdoor areas without WiFi. It can connect up to **25 devices** at distances of up to 50 metres. It can be used with a cable connected to the internet access point or with a 4G Nano SIM card*, delivering speeds of up to 150 Mbps. **It's also waterproof**, making it ideal for outdoor installation.

*not included and subscription required from your internet service provider.

Compact	76 x 152 x 25 mm
Product code	PC-POOLWLNK-4G
Power supply	12 DC 1A
WiFi	2.4 GHz
Connectors	WAN / LAN RJ45
Warranty	2 years




BY-PASS KIT 50

This **By-Pass Kit** enables you to connect your heat pump to your swimming pool filtration system. Compatible with the entire Poolex range (excluding Megaline).

INCLUDED IN THIS KIT

- 3 valves Ø 50 mm
- 2 elbow connectors Ø 50 mm
- 2 T-connectors Ø 50 mm
- 1 tube of glue
- 1 bottle of stripper

Product code	PC-BYPASS-50
--------------	--------------

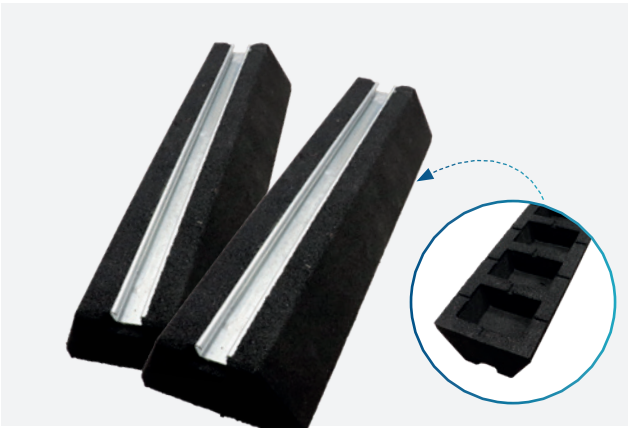

BIG FOOT MOUNTS

Poolex's Big Foot, made from **recycled tyres** with an aluminium rail, **can be fitted to all our heat pumps**. Easy to install on flat ground (sand or gravel), their elasticity **reduces vibrations and noise**.

*excluding Megaline and mini heat pumps

Compact	600 x 180 x 100 mm
Product code	PC-FEET60
Compatibility	The entire Poolex range*
Weight	10.8 kg
Material	Recycled tyre
Weight supported	450 kg



BY-PASS KIT 32/38

This **By-Pass kit** allows you to connect your **"mini" heat pump** to the filtration system of your aboveground swimming pool or to any other filtration system.

INCLUDED IN THIS KIT

- 1 three-way valve Ø 50 mm
- 3 adaptors Ø 32/38 mm
- 1 T-connector Ø 32/38 mm
- 6 stainless steel hose clamps
- 1 roll of Teflon

Product code	PC-BYPASS-32
--------------	--------------



THERMOMETER WITH REMOTE DISPLAY

This thermometer measures the temperature in **real time** thanks to a **floating sensor**. Data is sent wirelessly to the **remote display**, ideal for **accurate and convenient** pool monitoring. **Robust and waterproof**, it is **durable and easy to use**.

Product code	PC-THERM01WS
Waterproof rating	IPX7
Battery	2 AA batteries 1.5V / device (not included)
Warranty	2 years




Quick reminder about filter pumps

A filter pump is an essential part of a healthy swimming pool. It **circulates the water through the filter to remove impurities and debris**, while **distributing chemical products evenly**. It keeps the water clean and healthy and is at the heart of water **purification** and **circulation**.

HOW TO CHOOSE THE RIGHT PUMP?

Sizing a swimming pool pump depends on several key factors:



Volume of the pool in m³

- Rectangle: Lenght x width x height
- Round: (π x diam x diam /4) x average height

÷



Circulation time

8 hours -> Standard NF16713-1/2/3
Renews water 3 times every 24h
(We recommend a circulation time of 6h)

=



Flow rate of the pump in m³/hour

= volume / desired circulation time
Warning: to check pressure loss, refer to the graph with TDH (mH2O) at 8 to 10 m

WHEN SHOULD IT BE SWITCHED ON?

There are several factors that determine how long and what time of day a filter pump should run.



Season

In winter, it should only be run for a few hours when the temperature is below freezing, while in summer the recommended filtration time is equal to [water T° / 2] at temperatures up to 28°C. Above this, the pump should be running 24/7.



Rain and environmental conditions

The outdoor elements such as rain, wind and leaves can introduce contaminants and affect the quality of pool water, requiring additional filtration.



Pool use

Bathers are the biggest polluters of swimming pools. If you use your pool a lot, you'll need to run it during the hottest part of the day; if you get sunburned, so will your pool!

	FIXLINE					MULTILINE	VARILINE				
Versions	075	100	150	200	300	150	15H	10P	15P	20P	30P
SCOP	-	-	-	-	-	A	B	B	A	A	A
Flow rate (m3/h) at 10 mH2O If set at 3,000 RPM for Multiline and Variline	12	17	21	24	26	10	12.5	14	17	19	21
Power consumption (P1) (kW)	0.75	1.10	1.50	1.80	2.20	0.580	0.860	0.877	1.055	1.185	1.350
Power consumption for 18hrs of filtration (kW)	13.5	19.8	27	32.4	39.6	10.5	15.5	15.8	19	21.3	24.3
i.e. cost/cycle (€)*	3.37	4.95	6.75	8.1	9.9	2.61	3.87	3.95	4.75	5.33	6.07
Swimming pool type	Above-ground, in-ground pool						In-ground pool				
Max. recommended pump-pool distance (TDH)	8 ~ 10					8 ~ 10	8 ~ 10				
Pump type	Single-speed					Multi-speed	Variable speed ⁴ <i>program settings</i>				
Speed modulation	No					1000-3450 ^{RPM}	450-3450 ^{RMP}				
Motor type	2-pole asynchronous motor					Permanent magnet synchronous					
Noise level at 10 m	65 to 68 dB					<45 dB at 1,500 ^{RPM}	<45 dB at 1,500 ^{RPM}				
Prefilter	High capacity										
Power supply	Single-phase 220-240V ~ 50Hz										
Connections	1"1/2					2"	1"1/2	2"			
Connectors included	Union fitting for solvent cementing Ø50/63mm						Not included				
Compatible with che-mical & salt treatment	✔					✔	✔				
Warranty	3 years					3 years	3 years				

* Cost/Cycle = Electricity consumption (KWh) * Electricity price (€/kWh: 0.25€)



NEW ARRIVALS
★ 2025



FixLine

SINGLE-SPEED
FILTER PUMP



MultiLine

MULTI-SPEED
FILTER PUMP



2-pole asyn-
chronous motor




Single-speed



Compatible with
all treatments

The Fixline pump ensures **continuous and effective filtration** with uniform distribution of chemical products. **Affordable** and **compatible with all types of treatment**, it combines **robustness** with **durability** and **low maintenance costs**, guaranteeing clean water for many seasons to come.

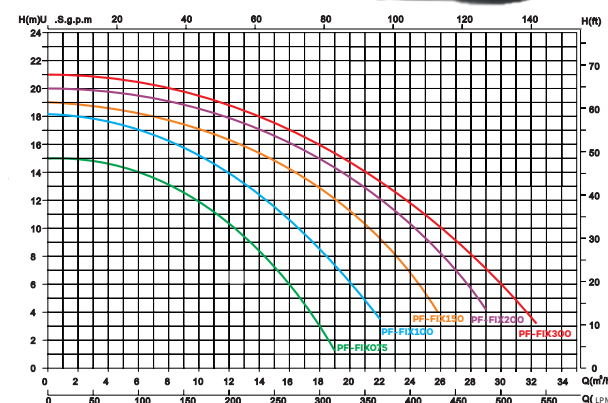

FIXLINE	0.75	1	1.5	2	3
Pool volume	70 m³	100 m³	125 m³	140 m³	155 m³
Product code	PF-FIX075	PF-FIX100	PF-FIX150	PF-FIX200	PF-FIX300
Output power (HP) - P2	0.75	1	1.5	2	2.5
Power consumption (kW) - P1	0.75	1.1	1.5	1.8	2.2
Connector diameter	1.5"x2" / 50 x 63 mm				
Flow rate at 10 mH2O	12.2 m³/h	16.5 m³/h	21.2 m³/h	24.2 m³/h	26 m³/h
Weight	13.6	13.8	14	14.2	14.5
Power supply	Single-phase 220-240V ~50Hz				
Dimensions in mm (L x W x H)	652 x 195 x 308				
Max. current (A)	3.5	5	6.8	8.2	10
Warranty	3 years				



Permanent magnet
synchronous motor




Multi-speed




Compatible with
all treatments

The Multiline pump can be manually set to **3 different speeds** depending on the use of the pool, giving better **energy efficiency** than a fixed-speed pump. It ensures **optimum filtration** by slowing down the flow of water. Equipped with a **digital control panel** and a 1.5m self-priming function, it is extremely **quiet**.

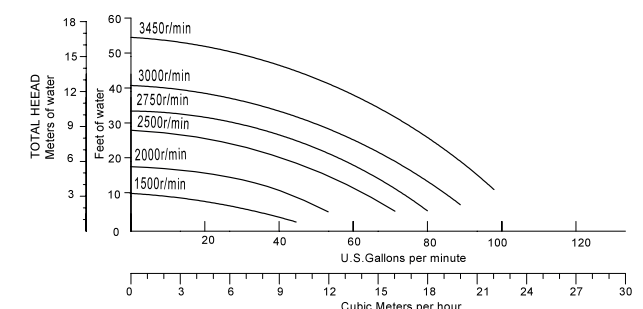

DIMENSIONS

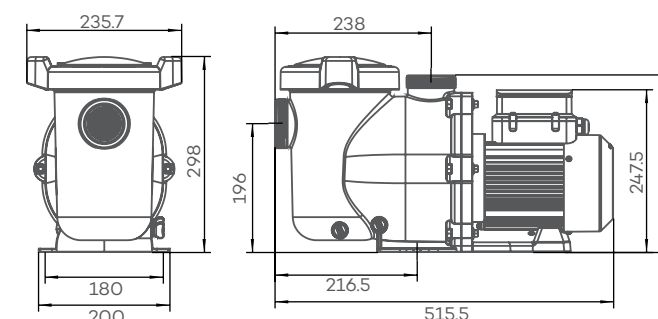

MULTILINE	1.5
SCOP	A
Horsepower	1.5 HP
Diameter of female connector	2"x2"
Connectors included	D50 & D63 mm
Speed modulation	1000 - 3450 RPM
Max. flow rate at 8 mH2O	18 m³/h
Max. flow rate (m³/h)	22 m³/h
Max. dynamic head (m)	15
Power supply	Single-phase 220-240V~50Hz
Max. current (A)	6
Weight (kg)	8.75
Warranty	3 years



Class A Performance
SCOP >7

LONG LIFE
Longer service life

WiFi & Cloud

Ultra-quiet

Compatible with
all treatment

The VariLine offers **energy savings** by **automatically adjusting** the filtration flow rate. It improves filtration quality by slowing down the flow of water through the filter. It also **optimises the performance of your Full Inverter** heat pump by maintaining the water temperature. Now with **WiFi** for remote control and monitoring.

WARRANTY
• **3 years:** filter pump

ECONOMICAL

Operating a variable speed pump at 50% for 24 hours reduces energy costs by almost 80% compared to running an On/Off pump for 8 hours.

FILTRATION

As water passes more slowly through the filter, filtering is improved and the filter does not become clogged as quickly.

LONGEVITY


Longer life: Less demand is placed on the motor and compressor, generating less heat and reducing wear.

SILENT

At low speed, noise levels are reduced by a factor of 4 compared to a fixed-speed pump (<45 dB)

NEW IN 2025

We're proud to present the new edition of the VariLine you have known for several years. It now includes WiFi for easy remote control via the Poolex app and simplified maintenance thanks to the Cloud.

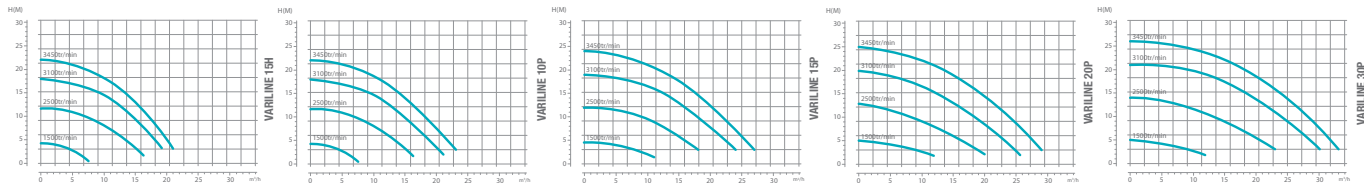

VARILINE	15H	10P	15P	20P	30P
SCOP	B	B	A	A	A
Product codes	PF-VL15H	PF-VL10P	PF-VL15P	PF-VL20P	PF-VL30P
Horsepower	1.5 hp	1 hp	1.5 hp	2 hp	3 hp
Diameter of female connector	1.5"x1.5"	2"x2"	2"x2"	2"x2"	2"x2"
Motor type	Permanent magnet synchronous				
Speed modulation	450 - 3,450 tr/min				
Flow at 10 mH2O	17.5 m³/h	19 m³/h	22 m³/h	24.3 m³/h	28.2 m³/h
Max. flow rate	21 m³/h	23 m³/h	27 m³/h	29 m³/h	33.3 m³/h
TDH (m)	22	22	24	25	26
Power supply	Single-phase 220-240V-50Hz				
Dimensions in mm (LxWxH)	596 x 270 x 306		605 x 270 x 338		
Current (A)	5.5	5.5	7	8	10
Warranty	3 years				



THINCLEAR

	MONO	MULTI
Type of filter media	Cartridge	
No. of models	3	4
Pool size	from 80 to 110 m³	from 110 to 190 m³
Cleaning frequency (filter rinsing or tank backwashing)	●●○	●○○
Pool type	Above-ground + Residential	Residential
Filtering capacity	15 µm	
6-way valve	Without	
Cover	Opaque	
Volume of water / hour	from 13 to 19m³/h	from 18 to 32m³/h
Opening / Closing	Quick release clamp	
Material	Polypropylene fibres	
Tank warranty	10 years	
Built-in filter pump	-	
Input / Output connections	50 / 63 mm	

Backwash -



ROCK		ULTRA	
TOP	SIDE	TOP	SIDE
Pureflow / Sand / Glass		Pureflow / Sand / Glass	
3	4	2	5
from 60 to 125 m³	from 60 to 185 m³	from 60 to 80 m³	from 60 to 180 m³
●●●		●●●	
Residential		Residential	
10 µm / 40 µm		10 µm / 40 µm	
Top	Side	Top	Side
Opaque	Transparent	Opaque	Transparent
from 10 to 22m³/h	from 10 to 32m³/h	from 10 to 14m³/h	from 10 to 30m³/h
Worm drive hose clamp		Worm drive hose clamp	
Fibre-reinforced polyester		HDPE	
10 years		10 years	
-		-	
50 / 63 mm		50 mm	50 / 63 mm






Thinclear mono

BATHE IN PERFECTLY
FILTERED WATER

COMPATIBLE:
From 80 to 110m³



More eco-friendly
no backwashing



Filtration down
to 15µm



Corrosion
resistant



Sustainable
materials




Easy
to use

Thinclear Mono provides a large surface area for filtration, capable of removing particles and impurities as small as **15 microns**. A single cartridge can be installed per model, ideal for **pools up to 110 m³**. Each model has a different size cartridge. Unlike sand filters, the cartridges **do not require backwashing** and can be easily cleaned with a hose, **saving a large amount of water** each year.

WARRANTIES

- **10 years:** tank
- **3 years:** valve (excluding seals, domes and pressure gauges)

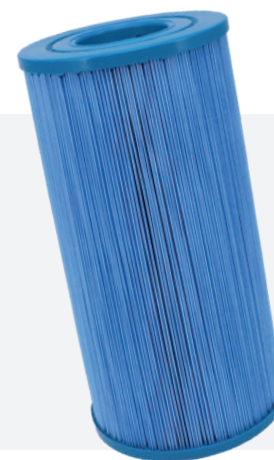

1 FILTER CARTRIDGE INCLUDED

Cartridge filters are a high-quality solution for filtration, offering exceptional performance thanks to state-of-the-art filtering materials.



Reduced water
consumption



Easy
maintenance



Filter fineness



Durability




Quick release clamp



Input & output connector

FEATURES

THINCLEAR MONO	THINCLEAR 100	THINCLEAR 150	THINCLEAR 200
Product codes	PF-TCR100	PF-TCR150	PF-TCR200
Maximum flow rate (m ³ /h)	22.7	27.2	27.2
Recommended flow rate (m ³ /h)	13	17	19
Filtration area (m ²)	9.29	13.94	18.58
Volume of water filtered (m ³) (based on an average filtration time of 6 hours)	80	100	110
Input/Output connections	2"/2.5" - 50/63mm		
Dimensions in mm (AxBxC)	825 x 444.5 x 588	910 x 444.5 x 588	1033 x 444.5 x 588
Dimensions in mm (DxExF)	304 x 335 x 91		
Flow velocity (m ³ /h/m ²)	1.5	1.2	1
Tank Warranty	10 years		

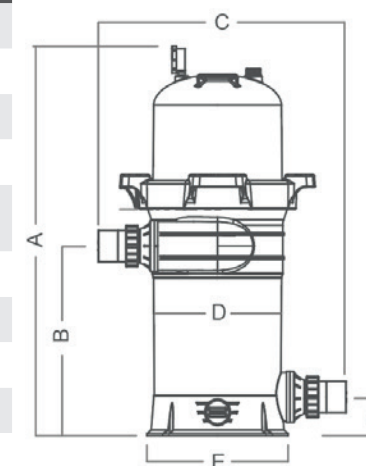

	100	150	200
Product codes	PF-TCR100CT	PF-TCR150CT	PF-TCR200CT
Dimensions G (in mm)	Ø 497	Ø 590	Ø 717
Dimensions H (in mm)	Ø 267		
Filter fineness (µm)	15		
Number of pleats	137	172	187

Exclusive offer
in stores

Thinclear multi

FOR CRYSTAL CLEAR AND
SPARKLING WATER

COMPATIBLE:
From 110 to 190m³

More eco-friendly
no backwashing

Filtration down
to 15µm

Corrosion
resistant

Sustainable
materials

Easy
to use

Thinclear Multi provides a large surface area for filtration, capable of removing particles and impurities as small as **15 microns**. Multiple cartridges can be installed for increased filtering capacity, ideal for **large volumes**. Unlike sand filters, the cartridges **do not require backwashing** and can be easily cleaned with a hose, **saving a large amount of water** each year.

WARRANTIES

- **10 years:** tank
- **3 years:** valve (excluding seals, domes and pressure gauges)

CARTRIDGE FILTERS INCLUDED

Cartridge filters are a high-quality solution for filtration, offering exceptional performance thanks to state-of-the-art filtering materials.

Reduced water
consumption

Easy
maintenance

Filter fineness


Durability

Quick release clamp

Input and output

FEATURES

THINCLEAR MONO	THINCLEAR 330	THINCLEAR 430	THINCLEAR 530	THINCLEAR 680
Product codes	PF-TCR330	PF-TCR430	PF-TCR530	PF-TCR680
Maximum flow rate (m³/h)	28.1	34.1	34.1	34.1
Recommended flow rate (m³/h)	18	20	25	32
Filter area (m²)	30.73	39.97	49.19	63.17
Volume of water filtered (m³) (based on an average filtration time of 6 hours)	110	120	145	190
Input/Output connections	2"/2,5"-50/63mm			
Dimensions in mm (AxBxC)	886 x 648 x 556	1035 x 648 x 556	1223 x 648 x 556	1362 x 648 x 556
Dimensions in mm (DxExF)	504 x 462 x 317,5 x 444,5			
Flow velocity (m³/h/m²)	0.6	0.5	0.5	0.5
Tank Warranty	10 years			

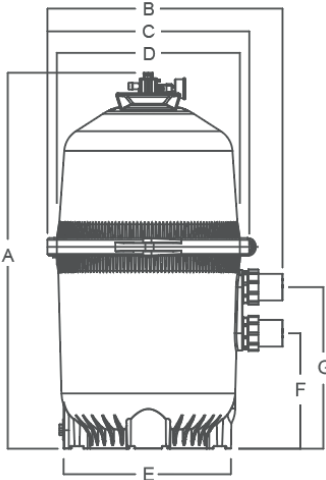

For information purposes only and subject to change without notice


	330	430	530	680
Product codes	PF-TCR330CT	PF-TCR430CT	PF-TCR530CT	PF-TCR680CT
Dimensions H (in mm)	Ø 498	Ø 647	Ø 835	Ø 485
Dimensions I (in mm)	Ø 178			
Filter fineness (µm)	15			
Number of pleats	198	197	187	209
No. of components	4			8



Rock top & side

FOR CRYSTAL CLEAR AND SPARKLING WATER

COMPATIBLE:
From 60 to 185m³



Ultra-durable tank
fibre-reinforced polyester
+ gelcoat



Compatible with a wide
range of filtration pumps



Sustainable
materials



Easy
to use

Rock Top & Rock Side filters provide excellent filtration with a **robust laminate construction that is pressure resistant and durable**. Designed for **easymaintenance** with simple cleaning and replacement of filter components. **They are compatible with a variety of pumps** and can be easily integrated into different filtration systems.

WARRANTIES

- **10 years:** tank
- **3 years:** valve (excluding seals, domes and pressure gauges)




Worm drive hose clamp




6-way valve made of robust ABS plastic and stainless steel.



Reservoir materials
Glass fibre reinforced
laminate



**Max. operating
pressure**
36 psi / 2.5 bar




**Filtered
grain size**
0.5-0.8 mm



**Maximum
temperature**
40°C (104°F)


FEATURES ROCK TOP

ROCK TOP	TOP 500	TOP 650	TOP 750
Product codes	PF-RCK500T	PF-RCK650T	PF-RCK750T
Maximum flow rate (m ³ /h)	10	16.5	22
Diameter (mm)	Ø 500	Ø 650	Ø 750
Filtration area (m ²)	0.20	0.33	0.44
Volume of water filtered (m ³) (based on an average filtration time of 6 hours)	60	95	125
Input/Output connections	1.5" / 50mm		2.0" / 63mm
Dimensions in mm (AxBxC)	886 x 750 x 693	998 x 862 x 805	1159 x 1029 x 945
Dimensions in mm (DxExF)	286 x 390 x 500	318 x 500 x 650	251 x 500 x 750
Sand (kg) / Glass (kg)	88 / 70	158 / 125	260 / 210
Warranty	Filter tank: 10 years / Valve: 3 years		

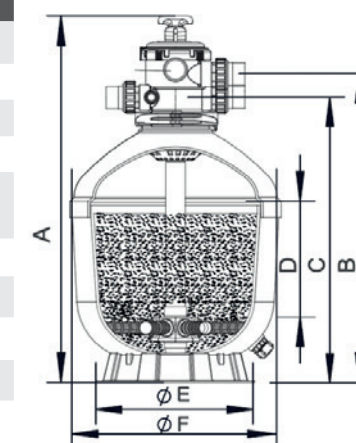

FEATURES ROCK SIDE

ROCK SIDE	SIDE 500	SIDE 650	SIDE 750	SIDE 900
Product codes	PF-RCK500S	PF-RCK650S	PF-RCK750S	PF-RCK900S
Maximum flow rate (m ³ /h)	10	16.5	22.1	31.8
Diameter (mm)	Ø 500	Ø 650	Ø 750	Ø 900
Filtration area (m ²)	0.20	0.33	0.44	0.64
Volume filtered (m ³ in approximately 6h)	60	95	125	185
Input/Output connections	1.5" / 50mm		2.0" / 63mm	
Dimensions in mm (AxBxC)	424 x 487 x 845	472 x 535 x 943	517 x 603 x 1015	583 x 669 x 1165
Dimensions in mm (DxExF)	360 x 516 x 390	380 x 666 x 390	440 x 770 x 500	480 x 920 x 780
Sand (kg) / Glass (kg)	100 / 70	185 / 150	265 / 215	405 / 325
Warranty	Filter tank: 10 years / Valve: 3 years			

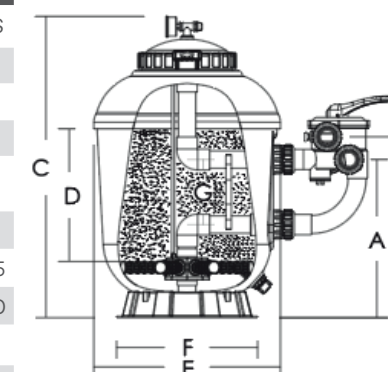

For information purposes only and subject to change without notice



Ultra top & side

GET CRYSTAL CLEAR WATER EFFORTLESSLY

COMPATIBLE:
From 60 to 180m³

Exclusive offer in stores

Ultra light filter tank
Recyclable HDPE

Compatible with a wide
range of filtration pumps


Sustainable
materials

Easy
to use

Ultra Top & Ultra Side sand filters, **resistant to high pressures**, guarantee **remarkable durability** in the most demanding environments. Their **ease of maintenance** reduces downtime and they can be easily integrated into a range of pumps, optimising energy efficiency. Designed for residential and public pools, they provide exceptional filtration, **longer service life** and are extremely **easy to maintain**.

WARRANTIES

- **10 years:** tank
- **3 years:** valve (*excluding seals, domes and pressure gauges*)

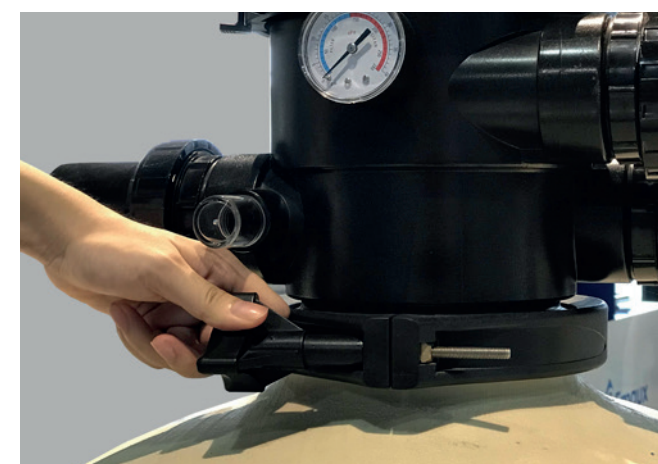

Worm drive hose clamp




6-way valve made of robust ABS plastic and stainless steel.



Reservoir materials
HDPE (High-density polyethylene)



Max. operating pressure
40 psi / 2.8 bar



Filtered grain size
0.5-0.8 mm




Maximum temperature
50°C (122°F)


FEATURES ULTRA TOP

ULTRA TOP	TOP 20	TOP 24
Product codes	PF-ULT500T	PF-ULT600T
Maximum flow rate (m ³ /h)	10	14
Diameter (mm)	Ø 500	Ø 600
Filtration area (m ²)	0.20	0.28
Volume of water filtered (m ³) (based on an average filtration time of 6 hours)	60	80
Input/Output connections	1.5" / 50mm	
Dimensions in mm (AxBxC)	889 x 772 x 712	980 x 860 x 800
Sand (kg) / Glass (kg)	70 / 55	125 / 100
Warranty	Filter tank: 10 years / Valve: 3 years	

ULTRA TOP



ULTRA SIDE



FEATURES ULTRA SIDE

ULTRA SIDE	SIDE 20	SIDE 24	SIDE 27	SIDE 31	SIDE 35
Product codes	PF-ULT500S	PF-ULT600S	PF-ULT675S	PF-ULT775S	PF-ULT875S
Maximum flow rate (m ³ /h)	10	14	18	23.5	30.5
Diameter (mm)	Ø 500	Ø 600	Ø 675	Ø 775	Ø 875
Filtration area (m ²)	0.20	0.28	0.36	0.47	0.61
Volume filtered (m ³ in approximately 6h)	60	80	105	140	180
Input/Output connections	1.5" / 50mm		2.0" / 63mm		
Dimensions in mm (AxBxC)	396 x 549 x 760	430 x 493 x 825	460 x 546 x 946	508 x 594 x 968	564 x 650 x 1086
Dimensions in mm (DxExF)	225 x 500 x 125	280 x 600 x 125	300 x 675 x 130	370 x 775 x 130	440 x 875 x 130
Sand (kg) / Glass (kg)	70 / 55	125 / 100	185 / 150	320 / 255	430 / 345
Warranty	Filter tank: 10 years / Valve: 3 years				

For information purposes only and subject to change without notice

Optiball 700g

THE ECO-CONSCIOUS CHOICE:
UNIVERSAL FILTER BALLS



More environmentally friendly



Filtration down to 3µm



100% recyclable polyethylene




Easy to use

Optiball is the ideal solution for **keeping water healthy and clean** while **reducing costs and environmental impact**. These filters effectively remove organic contaminants and suspended particles. **Washable and environmentally friendly**, they provide high quality filtration while reducing the carbon footprint of pool maintenance.

Product code	PF-OPTIBALL700C
Quantity	700 g
Filter fineness	Filtration down to 3µm

SAND FILTER COMPATIBLE



700 g
of Optiball




= 25kg
of sand



= 20kg
of glass

Choose an ultra-lightweight unit that is easy to handle and move around. It can be hosed clean with cold water or machine washed in a bag 30°C without detergent.

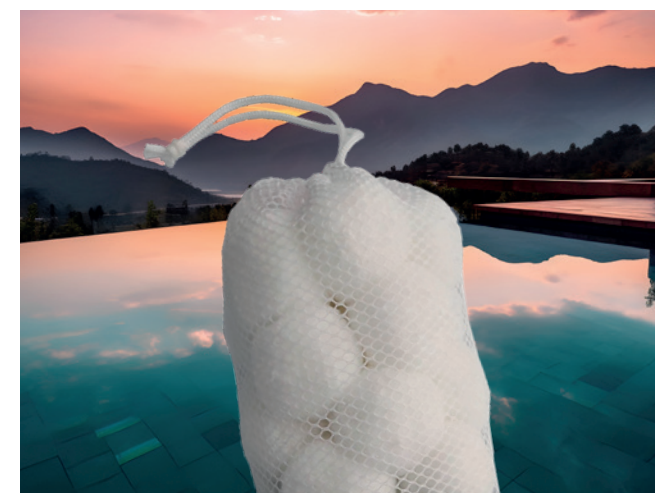

Choose an ultra-lightweight unit that is easy to handle and move around. It can be hosed clean with cold water or machine washed in a bag 30°C without detergent.

OPTIMAX 100G BALL CARTRIDGE



More environmentally friendly



Filtration down to 3µm



100% recyclable polyethylene

Discover the power of pure water with Optimax. Equipped with a reusable and eco-friendly mesh, this cartridge contains a filter media impregnated with activated charcoal for exceptional water clarity. Its long life offers reliable and affordable filtration, in addition to easy installation which makes it accessible for everyone.

Ball cartridges replace type A filter cartridges (Ø 10.5 cm & height 20 cm)

Product code	PF-OPTIMAXC
Quantity	100 g
Filter fineness	Filtration down to 3µm
Compatibility	Type A cartridge

PUREFLOW

HIGH PERFORMANCE POLYMER FILTER



JL-P12058



JL-P14106



No pressure increase due to filtering



No clogging

The perfect solution for replacing filtration sand

This polymer fibre-based filter media favourably replaces the sand filter sand, glass or zeolite. Ultralight, 500 g of PureFlow replaces 36 kg of sand! Filters down to 10 µm, does not create a biofilm, and reduces backwashing and pressure in the filter.

JL-P12058

130 g
= 10 kg of sand
Ideal for sand filters

JL-P14106

Set of 2 antibacterial cartridges
Ideal to replace a spa filter

Quick reminder about salt chlorinators

Salt water chlorination is the conversion of sodium chloride (salt) dissolved in the water into sodium hypochlorite (active chlorine), a natural disinfectant present in salt water. When electric current is passed through salt water, it leads to the dissociation of salt molecules into chlorine ions and sodium ions, which then react to form sodium hypochlorite.



BENEFITS



Gentle on skin and eyes



Easy pool maintenance



No need to handle chemicals



Eliminates the excess of chlorine and stabiliser from tablets

GOOD PRACTICES TO KEEP YOUR WATER CRYSTAL CLEAR

Correct dosage of salt

This is the key to good salt water chlorination. The proper dosage of salt optimises the disinfection of your pool and extends the life of electrodes.

Correct dosage:
Between 3000 & 4000ppm

Check your pH

The sodium hypochlorite created during chlorination naturally increases the pH. It is therefore essential to regularly test the water or install an automatic pH regulator.

Correct dosage:
Between 7 and 7.4

Stabiliser

If the amount of stabiliser is too low, the sodium hypochlorite will revert to salt before it can disinfect, and if the stabiliser is too high, the hypochlorite will stop working. It's therefore important to have the right levels. It varies very little throughout the season.

Correct dosage:
From 20 to 50 ppm

Wintering

Below 10°C, salt chlorination is no longer effective, and it's time to winterize your chlorinator. Remove the cell, clean if needed and store it for the next season.

The right time:
Water less than 10°C



	AQUALYSER		SEL'IN					
Versions	Total	Flex	20	30	50	75	90	120
Production (g/h)	Adjustable: 4 / 8 / 12 / 16 / 20g/h		4	6	10	15	20	30
Pool volume	Up to 80 m³		20	30	50	75	90	120
Swimming pool type	In-ground pool		In-ground pool (& above-ground option)					
Salinity	2.7 to 4 ppm		2.7 to 4 ppm					
Modes	4 modes: ORP / pH minus / Timer / Manual		6 modes: Covered / Spring / Comfort / Summer / Summer+ / Boost ++					
Min/max flow rate (m³/h)	6 - 10		2 - 10					
Connection	D 50 mm for solvent cementing		D 50 mm and 32/38 mm					
Covered mode	Self-regulated by Redox mode		Manual					
Self-cleaning	Programmable		Automatic & programmable					
Alarms	Error (sound can be disabled)		Salt level / Flow rate					
Cell orientation	Horizontal		Horizontal or vertical					
Sensors included	pH and Redox		No					
Built-in analysis chamber	✔		No					
Cell type	Ruthenium coated titanium							
Cell service life	10,000 hours		10,000 hours					
Built-in flow sensor	✔		✔					
Warranty	5 years (housing + cell)		5 years (housing + cell)					
Connectivity	WiFi (Cloud / OTA / App)		No					
Pool-earth	Included		Included					



Aqualyser

THE TREATMENT OF CHOICE TO MAKE YOUR LIFE EASIER!

- Compatible with pools up to 80 m³
- pH sensors + ORP
- WiFi, Cloud & OTA
- Integrated lighting
- 2 versions: Total & Flex

This precise system ensures that the water remains healthy and clear, with easy and efficient management. Equipped with a **redox probe**, it constantly checks the level of disinfectant and **automatically adjusts the production of gaseous chlorine** according to the actual needs of the pool. A pH probe **monitors the pH of the water** and **regulates** the pump to ensure a perfect balance. Its "Total" version is the 1st compact salt chlorinator and pool equipment controller, a true all-in-one.

WARRANTY
• **5 years:** case + cell (10,000h)
excludes consumable parts

DEDICATED APP

- Set the dimensions of the pool for tailored treatment
- Control pH and redox and view history
- Reverse polarity to clean the electrolysis cell
- Control the level of salt in the water

OTA & CLOUD

OTA (over-the-air) allows the built-in software to be upgraded remotely. Connection to the Cloud provides:

- **Technical support:**
 - Check and change parameters remotely
 - Identify errors
 - Avoid unnecessary call-outs
 - Reduce downtime

Lighting integrated in the case for the "Total" version

Versions	TOTAL	FLEX
Product code	CL-AQUALYSR-TL1	CL-AQUALYSR-FX1
Pool volume (m³)	< 80 m³	
Chlorine production	max. 20g/hr Adjustable (4, 8, 12, 16 & 20 g/h)	
pH- pump flow rate	0.2l/min	
Max. power/standby	150W / 5W	
Connection	D50mm for solvent cementing	
Reverse polarity	Yes, adjustable: 4/6 or 8h	
Salinity	From 2.7 to 4 ppm (optimal 3 ppm)	
Probes & sensors	REDOX, pH, temp. & flow rate	
Modes	ORP / Timer / Manual / pH minus	
Connectivity	WiFi – Poolex APP	
Control filter pump relay	Yes (dry contact)	
Alarms	Error (sound can be disabled)	
History	Graph of main parameters (ORP, pH, Energy, Salt, Temp.)	
Pool-Earth	Yes - connect to ground rod (< 20 ohms)	
Analysis chamber	Yes: Separate from main flow for better durability and more accurate measurements	
Warranty	Case 5 years + titanium cell 10,000 hours	

FLEX VERSION (modular)

Designed with two separate modules, this version is perfect for conventional pool equipment rooms and offers great flexibility for renovation projects.

- Redox sensor
- pH sensor
- Salt chlorinator
- pH pump



Sel in

COMPACT AND POWERFUL SALT TREATMENT

COMPATIBLE:
From 20 to 120m³



Softer water:
Low salinity



Ultra compact



Pool-earth
included



Easy to install

Our **latest generation salt chlorinator** is designed for confined spaces with integrated electronics in an **ultra-compact cell**. It has coated titanium plates that guarantee **10,000 hours of use**, and **automatic reverse polarity cleaning**. Six modes, including Boost ++, adjust the water temperature for optimum performance.


WARRANTY

• **5 years:** case + cell

ELECTROLYSIS CELL

The Sel In electrolysis cell is made of Ruthenium-coated titanium plates.

This surface coating improves the efficiency of the electrolysis reaction and the durability of the plates. What's more, reverse polarity control during chlorine production reduces fouling.

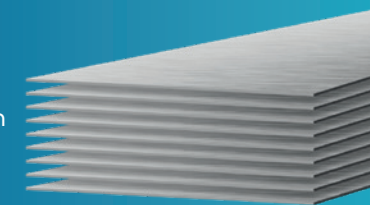

INTUITIVE USE



- On/Off
- Water temperature & production level
- Change operating mode
- Reverse polarity settings
- "Boost" mode
- Low salt level alarm



PRO TIP

Add a pH pump

For effective treatment with a salt chlorinator, the water balance is essential, particularly the correct pH level. The Pooler pH Pump, ideal for salt water chlorinators, automatically controls the pH and adjusts the dosage of pH minus to maintain a constant balance and keep the water healthy and clear.



Product code	PC-PPHMP2
Capacity	Pools up to 65 m ³

SELIN	SL20	SL30	SL50	SL75	SL90	SL120
Product code	CL-SL20	CL-SL30	CL-SL50	CL-SL75	CL-SL90	CL-SL120
Pool volume (m ³)	20	30	50	75	90	120
Production g/h	4	6	10	15	20	30
Connection	50 mm for solvent cementing / adaptors 32/38mm					
Salinity	From 2.7 to 4 ppm (optimal 3 ppm)					
Protection	IPX4					
Cover detection	Manual: limits production to 20%					
Reverse polarity	Yes, adjustable: 4/6 or 8h					
Alarms	High / low salt level, insufficient water flow / Errors					
Cell orientation	Horizontal or vertical					
Overall housing dimensions (mm)	125 x 160 x 145 mm / 125 x 160 x 190 mm					150 x 160 x 190 mm
Cell dimensions with connectors (mm)	Length 40 cm with connectors - DN 50 mm					
Modes	Automatic / Covered / Boost					
Accessories	Included: 2 x 32/38 mm connectors (excluding SL120) - 2 x 50 mm connectors for solvent cementing - Winter sleeve - Pipe end cap - Pool-Earth. Optional extras: Adjustable mounting bracket - pH pump.					
Warranty	5 years: case + cell 10,000 h					
Replacement cell for	SEL'IN SL20	SEL'INSL30	SEL'INSL50	SEL'INSL75	SEL'INSL90	SEL'INSL120
Product code	CL-SL20L	CL-SL30L	CL-SL50L	CL-SL70L	CL-SL90L	CL-SL120L

WELLNESS OPTIONS

SPA HEATING - INDOOR & OUTDOOR SAUNAS

Poolstar's signature wellness experience



Spawer range
Heat pumps for spas



Saunas

SPAWER

IceSpa

THE POWER OF A FULL INVERTER AND THE EFFICIENCY OF EVI DOWN TO TEMPERATURES OF -10°C

Exclusive offer in stores





Full Inverter Technology



Extreme conditions down to temperatures of -25°C



Remote control



plug & play



Ultra compact size

The Spawer IceSpa is a **heat pump for spas**, designed to maintain the temperature of the spa even in extreme weather conditions **down to -25°C**. It can heat the spa while **reducing energy consumption** by up to 75% thanks to **Full Inverter** technology. **Easy** to install, it is **compatible with all types of spas**, swim spas and Scandinavian hot tubs.

WARRANTIES

• 3 years: all components

• 7 years: compressor

• 15 years: titanium coil

ULTRA

HIGH-PERFORMANCE


EVI TECHNOLOGY

OPERATES AT TEMPERATURES DOWN TO -25°C



COMPACT

SIZE



REMOTE

CONTROL



Product code: PC-ICESPA		7
Air 26°C	Output power (kW)	3.3 ~ 7
Water 26°C	Power consumption (kW)	0.28 ~ 1.4
Humidity 80 %	COP	5 ~ 11.9
Air 15°C	Output power (kW)	2.8 ~ 4.7
Water 38°C	Power consumption (kW)	0.67 ~ 1.3
Humidity 70 %	COP	3.7 ~ 4.2
Air -10°C	Output power (kW)	2.2 ~ 3.3
Water 38°C	Power consumption (kW)	1.2 ~ 1.5
Humidity 70 %	COP	1.8 ~ 2.1
Air 15°C	Output power (kW)	3.2 ~ 3.7
Water 26°C	Power consumption (kW)	0.87 ~ 1.2
Humidity 70 %	COP	3 ~ 3.7
Power supply		Single-phase 220-240V-50Hz
Heating temperature range		15 °C ~ 40 °C
Cooling temperature range		4°C ~ 35°C
Operating range*		-25 °C ~ 43 °C
Max. output (kW)		1.7
Flow rate (m³/h)		3
Refrigerant		R32
Packaging dimensions (mm)		910 x 550 x 540
Dimensions (mm)		710 x 490 x 500
Net / gross weight (kg)		43 / 46
Noise level at 1 m (db(A))		48
Noise level at 10 m (db(A))		28
Compressor		GMCC - Rotary
Heat exchanger		Twisted Tech® Titanium
Mode		Heating + Cooling
Pressure loss (mH2O)		0.4
Accessories		Included: Power relay (x2) / RCD plug with 5m cable / Hydraulic connectors (x2) / Hose clamps (x2). Optional extras: Detachable touch screen / Hydraulic connection kit

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.



SPAWER

O'Spa

THE SPA HEAT PUMP
WITH CHILLER
FUNCTION



Chiller option included



Uses less power than a conventional heater



Remote control



Plug & play





Ultra compact size

The ultra-compact Poolex O'Spa is a spa heat pump that uses up to **75% less energy to heat the spa than traditional electric heaters**. The O'Spa can be installed in any type of spa or Scandanavian hot tub and can take control of the existing electric heater to optimise spa heating or when the ambient temperature is too low. The integrated **chiller function** also lets you enjoy an **ice bath** after an intense workout session, for example.

WARRANTIES

- **2 years:** all components
- **5 years:** compressor
- **10 years:** titanium coil

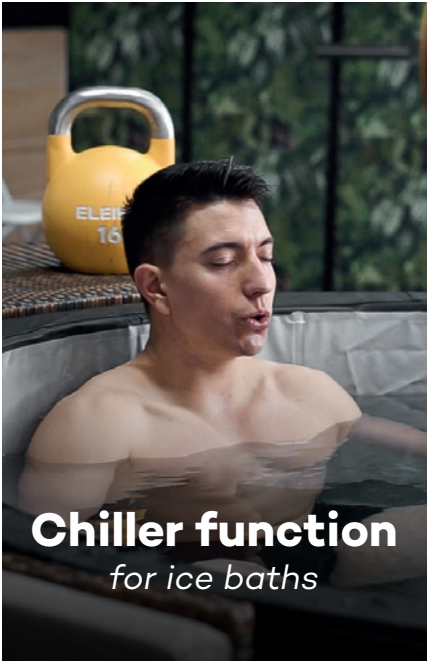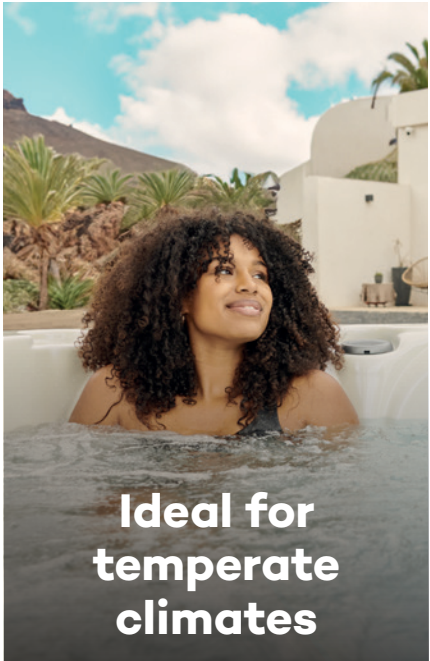

		3	5	7	
Product code: PC-OSPA		32	50	71	
Chiller	Air 26°C Water 26°C Humidity 80 %	Output power (kW)	3	5	7
		Power consumption (kW)	0.58	0.97	1.35
		COP	5.15	5.20	5.20
	Air 15°C Water 38°C Humidity 70 %	Output power (kW)	1.80	3.30	3.96
		Power consumption (kW)	0.65	1.10	1.34
		COP	2.77	3	2.95
	Air 35°C Water 27°C Humidity 70 %	Output power (kW)	1.80	2.35	3
		Power consumption (kW)	0.80	1.30	1.52
		EER	2.30	1.90	2
	Air 15°C Water 10°C Humidity 70 %	Output power (kW)	1.57	2	-
	Power consumption (kW)	0.53	0.75	-	
	EER	3.00	2.5	-	
Power supply		Single-phase 220-240V~50Hz			
Heating temperature range		10 °C ~ 40 °C			
Cooling temperature range		3°C ~ 28°C			
Operating range*		-15 °C ~ 43 °C			
Max. output (kW)		0.7	1.35	2	
Flow (m³/h)		1.3	2.16	2.16	
Refrigerant		R32			
Packaging dimensions (mm)		470 x 400 x 438		657 x 460 x 490	
Dimensions (mm)		440 x 350 x 430		600 x 430 x 430	
Net / gross weight (kg)		26 / 28	32 / 35	30 / 35	
Noise level at 1 m (db(A))		< 50	< 53	< 50	
Noise level at 10 m (db(A))		< 30	< 32	< 30	
Compressor		GMCC - Rotary			
Heat exchanger		Twisted Tech® Titanium			
Mode		Heating + Cooling (chiller)			
Pressure loss (mH2O)		1.2	1.2	1.2	
Accessories		Included: Power relay / RCD plug with 5m cable / Hydraulic connectors (x2) / Hose clamps (x2). Optional extras: Detachable touch screen / Hydraulic connection kit / Circulation pump relay			

*In extreme conditions, the heat pump maintains the temperature of the water. Carry out a thermal analysis to ensure correct sizing.



By-Pass kit 50mm

FOR CONNECTING A
HEAT PUMP TO YOUR SPA

INCLUDED IN THIS KIT

- A** 1 valves with 2 union fittings Ø 50 mm
- B** 2 reducing tee fittings Ø 50/32 mm
- C** 2 reducing sleeve connectors for pipe Ø 48/ Ø 50 mm
- D** 4 x 1m flexible PVC pipe Ø 32 mm
- E** 2 valves with 2 union fittings Ø 32 mm
- F** Flexible PVC glue + stripper
- G** 4 sleeves for solvent cementing Ø 32 mm
- H** 2 threaded fittings Ø 32 mm/1
- I** 2 threaded union fittings Ø 32 mm
- J** 1 roll of Teflon tape

This Poolex By-Pass kit allows you to connect your Spawer heat pump to your spa's filtration system, regardless of the type of 48/50mm filtration system.



ASSEMBLY OPTIONS



NOT INCLUDED

Flexible or rigid pipe
for solvent cementing
Ø50mm

Product code

SP-HLKITBYPASS

OTHER ACCESSORIES



Auxiliary relay

Thanks to this relay, your heat pump can control an auxiliary circulation pump, making everything completely autonomous, or it can even be used to heat the spa.

Product code

PC-SWRELAY1



Detachable touch screen

You can connect this detachable screen to your Spawer to control it remotely thanks to a 10 m cable. Included with the IceSpa, it comes as an optional extra for the O'Spa

Product code

PC-SWSCREEN

Cable length

10 metres

OUR SAUNAS

THE ESSENCE OF WELLBEING AT HOME

DIFFERENT TECHNOLOGIES:

The world of saunas is undergoing a revolution and is quickly becoming an essential part of home wellness. Through its Holl's brand, Poolstar offers solutions that are in tune with real needs, combining energy efficiency with authenticity.

Our compact and fully insulated models reduce energy consumption and the wood burning heater provides a traditional and immersive experience. For even more customisation, our catalogue is full of accessories and COMBI heaters that allow you to tailor the experience with higher humidity.

We all offer an optional on-site assembly service and some models are delivered pre-assembled.



STEAM

Traditional wellbeing

The enveloping heat of the steam sauna is the ideal way to relax and regenerate your body.

Its benefits include reducing stress, stimulating blood flow and improving skin quality.




INFRARED

A gentle heat for regular use

Infrared technology is an ideal alternative for sports enthusiasts, seniors and people looking for quick relaxation.

Thanks to the Full Spectrum + Magnesium heaters and Triple Care technology, our infrared saunas offer an enveloping heat for optimum wellbeing.

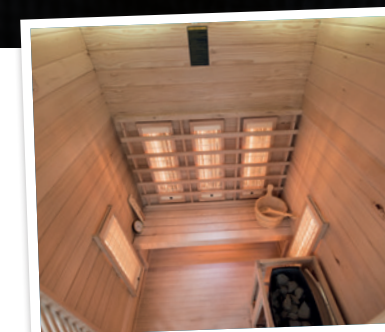

HYBRID

Tailored heating for all your needs

Hybrid technology combines the benefits of infrared heat and traditional heaters to create a personalised sauna experience.

Ideal for users looking for flexibility, you can now enjoy the best of both heating methods.

SELECTION GUIDE
INDOOR SAUNAS

STEAM TECHNOLOGY

DRY HEAT
maximum 25%

TEMPERATURE
70 à 90°C

FULL SESSION LENGTH
up to 1 hr
(split between several 10-15
min. spaced sessions)



	UTOPIA			ECCOLO	
	3	4	6	3	6
Technology	Steam			Steam	
Seated / reclined capacity	3	4 / 2	6 / 3	2	6 / 3
Dual Healthy heaters	-	-	-	-	-
Carbon panels	-	-	-	-	-
Power output (kW)	4.5	6	8	3.5	4.5
Included: Harvia stove (kW)	4.5	6	8	3.5	4.5
Lighting					
Chromotherapy					
Audio	MP3 / Bluetooth			-	
Control panel	Touch screen			-	
Wood	Hemlock & abachi			Red cedar & spruce	
Warranties <i>Electronics / Wood</i>	2 / 10 years			2 / 10 years	
Assembly (no. of people)	2	3	3	2	2

Benefits of Holl's

Starry sky ceiling lights
Spacious bench: 55cm in depth
Two-tiered bench (6 person)

Low energy consumption thanks to
reinforced insulation
Raised bench (2 person)
Two-tiered bench (6 person)

INFRARED
TECHNOLOGY

DRY HEAT
maximum 20%

TEMPERATURE
40 to 60°C

FULL SESSION LENGTH
from 25 to 45 min



	CANOPÉE			PUREWAVE			HYBRID COMBI	
	2	3C	6	2	3	3C	2	4
Technology	Infrared Quartz + Magnesium + Carbon			Infrared Quartz + Magnesium			Steam & Infrared Quartz + Magnesium	
Seated / reclined capacity	2	3/4	6 / 2	2	3	3/4	2	4 / 2
Dual Healthy heaters	2	4	7	5	6	7	6	8
Carbon panels	5	6	8	1	1	1	1	1
Power output (kW)	2.15	3.25	4	2.25	2.6	2.6	2.2	2.9
Included: Harvia stove (kW)	-	-	-	-	-	-	3.5	4.5
Lighting				-				
Chromotherapy								
Audio	MP3 / Bluetooth / Resonance speakers			MP3 / FM / Bluetooth			MP3 / FM / Bluetooth	
Control panel	Digital touch screen			Digital touch screen			Digital touch screen	
Wood	Spruce & abachi			Spruce & abachi			Red cedar & spruce	
Warranties <i>Electronics / Wood</i>	2 / 10 years			2 / 10 years			2 / 10 years	
Assembly (no. of people)	2	3	3	2	2	3	3	3

Benefits of Holl's

Unique infrared technology
Large glazed surfaces

Fully equipped and functional

Steam & infrared dual
technology



Utopia

YOUR JOURNEY TO WHERE
IT ALL BEGINS



Starry sky ceiling
lights



Hemlock



Comfortable
and spacious



Panoramic view



LED
chromotherapy


A true interlude of wellness The heat of a **traditional sauna**, the scent of solid wood and the **large glass windows and doors** invite you to escape. Utopia is a **haven of tranquillity**, a journey at your leisure. Water poured over the hot stones releases a gentle steam, a prelude to **total relaxation**. **Muscles relax** and **stress disappears** under the effect of heat. With a calmer mind and more relaxed body, circulation improves and the **heart regains its rhythm**.

WARRANTIES

- **2 years:** electronics
- **10 years:** wood



Spacious abachi benches with a depth of 55 cm



Outer panels made
of Hemlock wood




Starry sky LED ceiling
lights



LED chromotherapy
7 colours



Sauna kit included
Bucket / Ladle / Hourglass /
Thermometer / Hygrometer

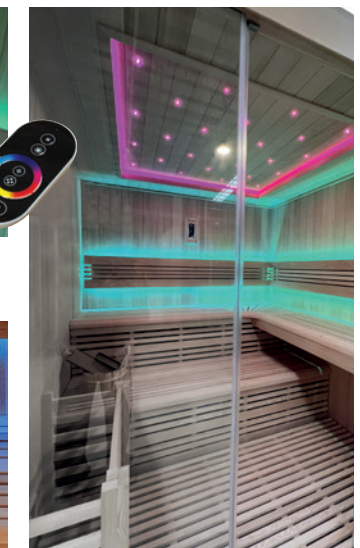

Large glazed surface for a
sense of freedom

FEATURES




NEW ARRIVALS
★ 2025

UTOPIA 3	UTOPIA 4	UTOPIA 6
HL-UTA03PK	HL-UTA04PK	HL-UTA06PK
3 persons	4 persons	6 person
155 x 145 x 196 cm	200 x 145 x 196 cm	200 x 183 x 210 cm
Harvia Vega 4.5 kW sauna heater included	Harvia 6 kW Vega stove included	Harvia 8 kW Vega stove included
LEDs mounted overhead and under the bench provide bright illumination and chromotherapy		
Interior lighting and starry sky effect ceiling		
Outer panels made of Hemlock wood		
Abachi bench and headrest		
Digital touch screen for MP3 and Bluetooth audio		
Sauna kit included		

Eccolo

ENERGY-SAVING SAUNA



Roof:

Mineral wool insulation + vapour barrier



Side panels:

Extruded polystyrene



Reinforced thermal insulation



Red cedar & spruce




LED chromotherapy

This sauna is available in two sizes: **2 or 6 persons**, with **optimised insulation** for significant **energy savings**. Its **insulated walls**, enclosed space under the benches and specially designed door minimise heat loss. For the 2-person sauna, a 3.5 kW heater is sufficient, while the 6-person version only needs a 4.5 kW heater thanks to its **high-performance insulation**.

WARRANTIES

- **2 years:** electronics
- **10 years:** wood

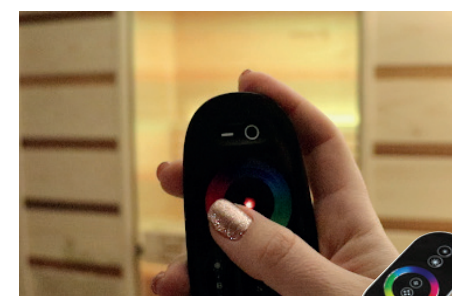

Subdued lighting and LED chromotherapy





Red cedar & spruce



Sauna kit included
Bucket / Ladle / Hourglass / Thermometer / Hygrometer

FEATURES

NEW ARRIVALS
★ 2025



ECCOLO 3	ECCOLO 6
HL-EC03-K	HL-EC04-K
2 person	6 person
150 x 130 x 190cm	200 x 175 x 190 cm
Harvia Vega 3.5 kW sauna heater included	Harvia Vega 4.5 kW sauna heater included
Interior LED chromotherapy	
Red cedar and spruce	
Double bench and headrests made of abachi wood	
Mineral wool insulation + vapour barrier	
Sauna kit included	



Canopée

DESIGN AND TECHNOLOGY
BECOME ONE!



Triple
Care

Triple care: Quartz +
Magnesium + Carbon



Resonance speaker
sound system



Canadian
spruce



LED
chromotherapy


Exceptional design and thoughtful finishes to create a **complete retreat**. Holl's designed this new range of infrared cabins to help you relax and unwind after a long day. **With "Triple Care" technology**, enjoy short and long infrared waves to **Reset & Restore**. Carbon heaters release a soothing heat, while quartz or magnesium heaters target muscular relaxation or detoxification. Bespoke moments of wellbeing for you and your family.

WARRANTIES

- **2 years:** electronics
- **10 years:** wood



LED chromotherapy and potentiometer

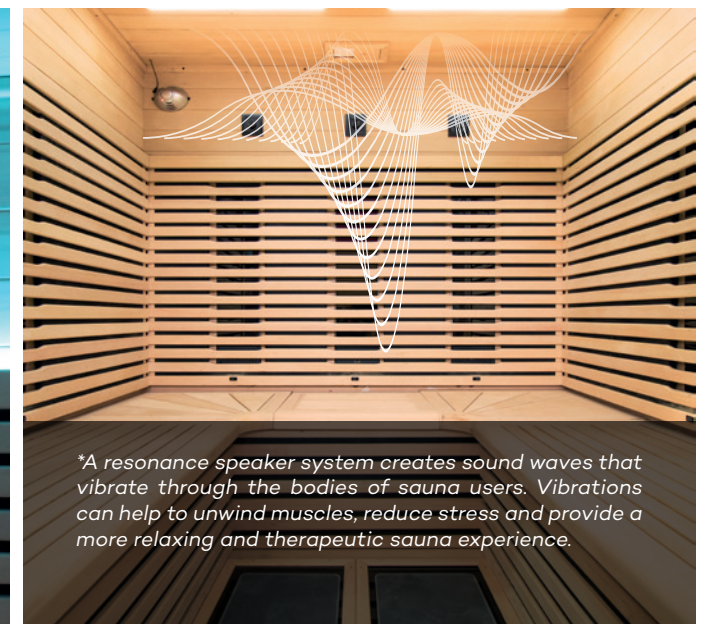


Resonance speaker*

*A resonance speaker system creates sound waves that vibrate through the bodies of sauna users. Vibrations can help to unwind muscles, reduce stress and provide a more relaxing and therapeutic sauna experience.



Ioniser for air purification



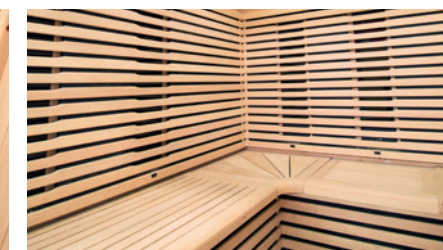


Bench & headrest made of
abachi wood



Touch screen control panel +
audio player

FEATURES



CANOPÉE 2	CANOPÉE 3C	CANOPÉE 6
HL-CNP02	HL-CNP03C	HL-CNP06
2 person	3/4 person	6 person
140 x 125 x 190 cm	160 x 160 x 190 cm	185 x 185 x 190 cm
2 Dual Healthy infrared heaters	4 Dual Healthy infrared heaters	7 Dual Healthy infrared heaters
5 carbon panels	6 carbon panels	8 carbon panels
2150 W heating power	3250 W heating power	4000 W heating power
LED chromotherapy		
Digital control panel & Bluetooth MP3 Audio with resonance speaker		
Exterior made of Canadian spruce		
Abachi bench and headrest		



Purewave

A WELLNESS BREAK FROM DAILY LIFE



Dual Healthy:
Quartz + Magnesium



Resonance speaker
sound system



Canadian
spruce




LED
chromotherapy

Set up and control each session with ease: music, quartz or magnesium infrared mode, chromotherapy, all designed for optimal comfort. This **white spruce infrared cabin from Holl's** has an **ultra-modern design** that is a great addition to any space. Equipped with **Full Spectrum Quartz/Magnesium** dual technology for gentle treatment and deep relief. **The Dual Healthy panels** and exceptional features are the perfect choice for incorporating wellness and aesthetics into your daily life.

WARRANTIES


- **2 years:** electronics
- **10 years:** wood

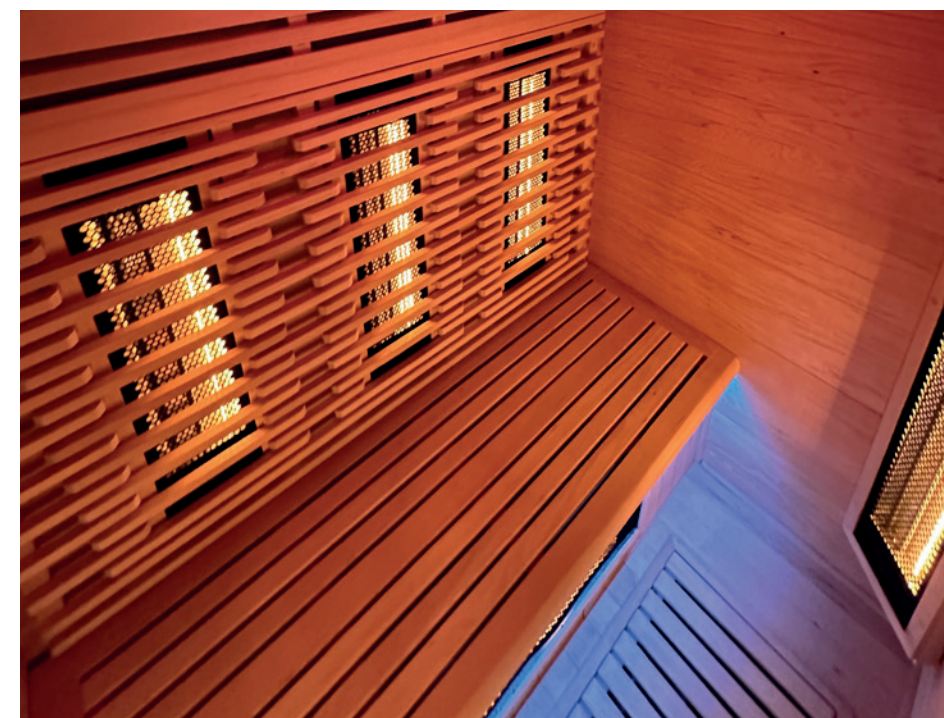


Bench & headrest made of abachi wood



Touch screen control panel + audio player



Exterior made of
Canadian spruce



Dual-action ionizer






7-colour LED
chromotherapy



High fidelity audio with
resonance speaker*

FEATURES



PUREWAVE 2	PUREWAVE 3	PUREWAVE 3C
HL-PUR02	HL-PUR03	HL-PUR03C
2 person	3 persons	3/4 person
130 x 110 x 190 cm	150 x 110 x 190 cm	140 x 140 x 190 cm
5 infrared heaters	6 infrared heaters	7 infrared heaters
2250 W heating power	2600 W heating power	2600 W heating power
LED chromotherapy		
Digital control panel & MP3 / FM / Bluetooth Audio with resonance speaker		
Exterior made of Canadian spruce		
Abachi bench and headrest		



Hybrid combi

STEAM AND INFRARED, THE BEST OF BOTH WORLDS



HYBRID TECHNOLOGY



A hybrid sauna combines the intense heat of an electric heater with the gentleness of infrared, offering a **customised experience**, tailored to each individual's preferences and needs, while maximising the benefits for **circulation**, **relaxation** and **muscle recovery**.



Bench & headrest made of abachi wood

FEATURES

NEW ARRIVALS
★ 2025



HYBRID COMBI 2	HYBRID COMBI 4
HL-HC02PK	HL-HC04PK
2 person	4 persons
140 x 130 x 190 cm	180 x 140 x 190 cm
2200 W : 6 Quartz + Magnesium heaters (350W) + 1 carbon panel (100W)	2900 W : 8 Quartz + Magnesium heaters (350W) + 1 carbon panel (100W)
3.5 kW heater	4.5 kW heater
Interior LED chromotherapy	
Red cedar and spruce	
Abachi bench and headrests	
Sauna kit included	



Dual Healthy:
Quartz + Magnesium



Distinctive style:
red cedar & spruce



Canadian
spruce



LED
chromotherapy

Choosing between the joys of a **traditional sauna** and the benefits of **infrared waves** is hard. That's why we've created a cabin that combines these two sauna designs! The Hybrid Combi is revolutionising the world of saunas, offering **steam or infrared sessions with quartz and magnesium waves in the same cabin**. Dual Healthy Quartz + Magnesium heaters are ideally placed to provide **maximum benefit**.

WARRANTIES

- **2 years:** electronics
- **10 years:** wood

GAÏA
RANGE



	GAÏA NOVA	GAÏA LUNA	GAÏA BELLA
Technology	Steam	Steam	Steam
Seated / reclined capacity	6 ♀ / 3 ♂	6 ♀ / 3 ♂	3 ♀ / 1 ♂
Recommend power of electric heater (kW)	6-8 (not included)	6-8 (not included)	4.5-6 (not included)
Rear window	-	-	-
Compatible with wood burning heater	✓	-	-
LED strip lighting	✓	✓	✓
Chromotherapy	✓	✓	✓
Audio	-	-	-
Wood	Spruce	Spruce	Spruce
Warranties <i>Electronics / Wood</i>	2 / 4 years	2 / 4 years	2 / 4 years
Assembly <i>(recommend no. of persons)</i>	3	3	3
Benefits of Holl's	Comfortable and adjustable bench	Outdoor terrace	Compact size
	Two-tiered bench	Comfortable and adjustable bench Two-tiered bench	Comfortable and adjustable bench Two-tiered bench

ONYXIA
RANGE



	ONYXIA CUBE	ONYXIA BARREL
Technology	Steam	Steam
Seated / reclined capacity	4 ♀ / 1 ♂	6 ♀ / 2 ♂
Recommended heater power (kW)	from 4.5 (not included)	from 6 (not included)
Rear window	Optional extra	✓
Compatible with wood burning heater	-	✓
LED strip lighting	✓	✓
Chromotherapy	-	-
Audio	-	-
Wood	Pine ThermoWood®	Pine ThermoWood®
Warranties <i>Electronics / Wood</i>	2 / 4 years	2 / 4 years
Assembly <i>(recommend no. of persons)</i>	4	4
Benefits of Holl's	Sustainable high-quality wood with low carbon footprint	Sustainable high-quality wood with low carbon footprint
	Contemporary and modern design Front and rear half-moon window options available	Contemporary and modern design Rear half-moon window

Gaïa Nova

A HAVEN OF PEACE
AND COMFORT



6 / 3
205 x 205 x 220 cm



Adjustable
upper bench



The heart of
tradition



Compatible
with wood
burning heater



Canadian
spruce



LED
chromotherapy

The Gaïa Nova outdoor sauna has all the features of the **top-of-the-range cabin** and its square shape gives it a **spacious feel**. Designed for **6 people**, you can enjoy a true **Finnish sauna experience** with its **two-tiered bench**. The upper bench is designed with comfort in mind, with a backrest and **folding recliner**, as well as a **removable headrest**. To complete the interior ambience, the cabin is equipped with a set of LED lights in 7 different colours, allowing you to enjoy the benefits of **chromotherapy**.

WARRANTIES

- **2 ans:** electronics
- **4 years:** wood



Comfortable folding recliner & 7-colour LED chromotherapy



Double bench



Heater positioned for optimum
comfort




Comfortable headrest



Wooden entrance step and exterior
cladding included

FEATURES

HL-B200E
6 persons seated or 3 reclined
Dimensions 205 x 205 x 220 cm
LED chromotherapy
Canadian Spruce
Wall thickness: 38 mm
Three-person, double height bench
Retractable upper bench + removable headrest
Bucket, ladle, hourglass, thermometer, hygrometer included
Bench and headrest made of FSC-certified Canadian spruce
Recommended heater 6 to 8 kW (not included)

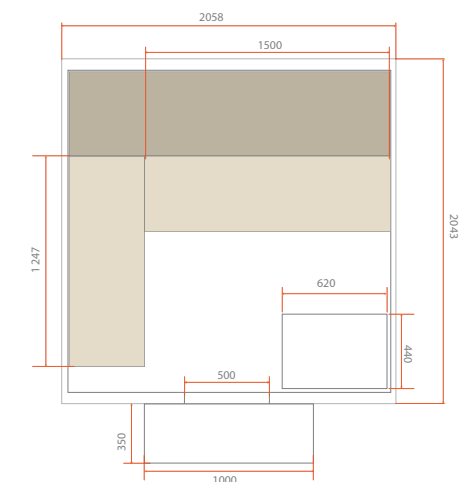

Gaia Luna

IN THE PUREST FINNISH TRADITION



6 / 3
250 x 205 x 220 cm



Adjustable
upper bench



The heart of
tradition



Outdoor
terrace



Canadian
spruce



LED
chromotherapy

Made of solid spruce, this outdoor sauna offers a **fold-away bench** for reclining and resting your head. Adjust the lighting using the **remote control** and enjoy all the benefits of **chromotherapy**. The Gaia Luna can **seat up to 6 people** and its **curved design optimises air flow** and heat circulation for **optimum comfort**. The **two-seater terrace** adds a **cosy touch**, perfect for enjoying a drink while taking in the surrounding scenery.

WARRANTIES

- **2 ans:** electronics
- **4 years:** wood



Comfortable folding recliner & 7-colour LED chromotherapy



Double bench




Heater positioned for optimum
comfort



Wooden entrance step and exterior
cladding included

FEATURES

HL-T250E
6 persons seated or 3 reclined
Dimensions 250 x 205 x 220 cm
LED chromotherapy
Canadian Spruce
Wall thickness: 38 mm
Two-tiered bench
Multi-positions upper bench
Bucket, ladle, hourglass, thermometer, hygrometer included
Bench and headrest made from FSC-certified Canadian spruce
Recommended heater from 6 to 8 kW (not included)

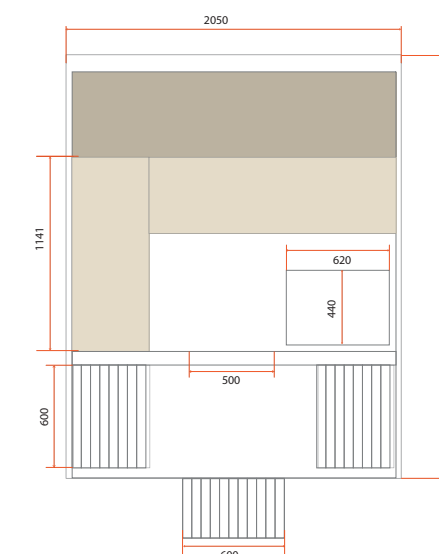



Gaïa Bella

A HAVEN OF PEACE
AND COMFORT


3 / 1
160 x 205 x 220 cm



Adjustable
upper bench



The heart of
tradition



Compact size



Canadian
spruce



LED
chromotherapy

Relaxation for two in the comfort of the Gaïa Bella. **Special lighting** enhances the benefits of chromotherapy. The white spruce cabin has a **Scandinavian design** and features **two double-tier benches**, with the upper bench **folding away and fitted with an integrated headrest**. **Ultra compact** and **elegant**, this outdoor sauna will seduce you with its rounded shape and **louvred windows** will add a touch of character to your garden.

WARRANTIES

- **2 ans:** electronics
- **4 years:** wood



Comfortable folding recliner & 7-colour LED chromotherapy



Double bench




Heater positioned for optimum
comfort



Glazed façade and louvered
wooden shutters

FEATURES

HL-T160E
3 persons seated or 1 reclined
Dimensions 160 x 205 x 220 cm
LED chromotherapy
Canadian Spruce
Wall thickness: 38 mm
Two-tiered bench
Multi-positions upper bench
Bucket, ladle, hourglass, thermometer, hygrometer included
Bench and headrest made of FSC-certified Canadian spruce
Recommended stove 4.5 to 8 kW (not included)

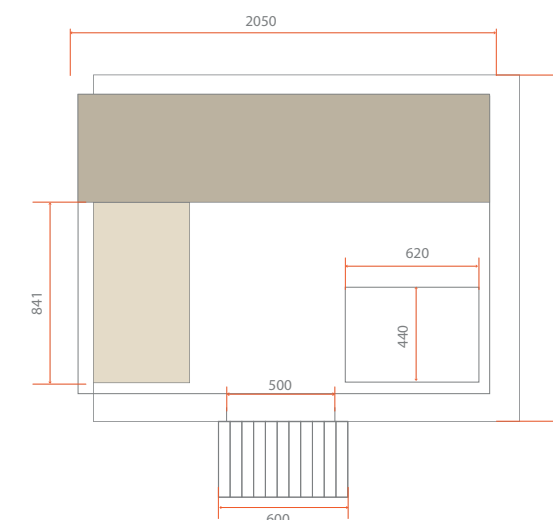


NEW ARRIVALS
★ 2025



Onyxia Cube

THE ELEGANCE OF
NATURALLY REINFORCED
& DURABLE WOOD

4 / 2
160 x 210 x 220 cm



ThermoWood®




Made in Europe



Personalisation



Panoramic view



LED wall lighting

The Onyxia Cube is a **spacious and elegant sauna**, designed to seat up to **4 people**. Its **contemporary design** combines **sustainable materials** and intense heat for immersive **relaxation** and **revitalisation**. It offers **exceptional durability** thanks to **ThermoWood® technology**. Its **large bay window** allows you to enjoy the scenery in complete privacy, creating a true haven of tranquillity. **Made in Europe**, it is the **perfect combination of modernity, comfort and authenticity**.

WARRANTIES

- **2 ans:** electronics
- **4 years:** wood



Bench & headrest made of abachi wood

Personalisation

Front façade



Glazed



Classic


Rear façade




Half-moon window



Classic

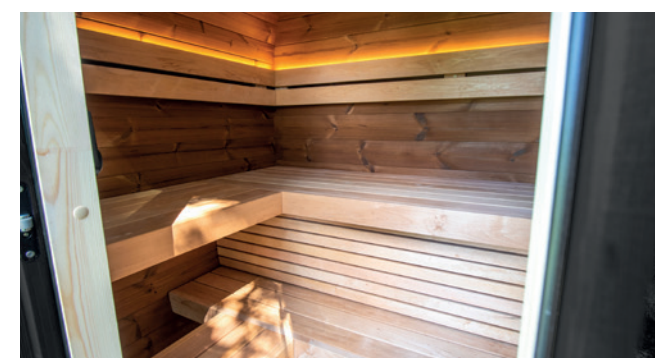

Spacious bench

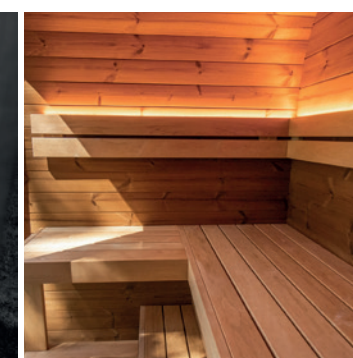

LED wall lighting



Panoramic view

FEATURES

HL-SSBLK160

4 persons seated or 2 reclined

Dimensions 160 x 210 x 220 cm

LED wall lighting

ThermoWood® heat-treated pine: longer lasting, more environmentally friendly, less maintenance


Waterproof black exterior paint

Two-tiered bench

Door made of 8mm tempered glass

1 protective floor mat included

Recommended heater from 4.5 kW (not included)

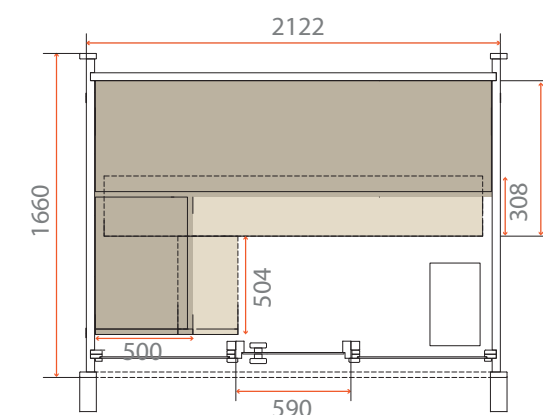

Sauna not available in the United Kingdom and the Netherlands.


NEW ARRIVALS
★ 2025



Onyxia Barrel

BLEND TRADITION & MODERNITY
WITH A WARM DESIGN IN
SUSTAINABLE WOOD

Made with
HARVIA




ThermoWood®



Made in Europe



Compatible with
wood burning
heater



2 opposite
benches



6 people seated
or 2 reclined

The Onyxia Barrel is an outdoor sauna that **blends tradition with modernity**, ideal for an authentic and immersive experience. **Constructed from heat-treated ThermoWood® for exceptional durability**, it features an elegant black finish and a **half-moon window** for panoramic views. Its **spacious** interior includes two full-depth benches, perfect for moments of relaxation. Tailored to your desires, it can be fitted with an electric or wood burning heater.

WARRANTIES


- **2 ans:** electronics
- **4 years:** wood



2 benches facing each other



LED wall lighting

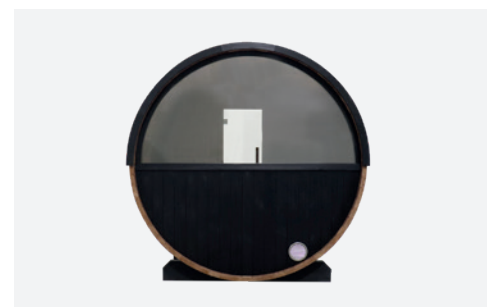

Half-moon rear window

THERMOWOOD®



Increased durability: Wood is more resistant to mould and insects.



Dimensional stability: Reduces variations due to humidity.



Eco-friendly: No added chemicals, wood from certified forests and 100% recyclable.



Easy to maintain: No treatment required, it adapts to any climate and takes on a light silver tint over time.

FEATURES

HL-ONYXBARREL

6 people seated or 2 reclined

Dimensions 240 x 225 x 226 cm

ThermoWood® heat-treated pine: longer lasting, more environmentally friendly, less maintenance


Waterproof black exterior paint

2 benches facing each other

Door made of 8mm tempered glass

1 protective floor mat included

Recommended heater 6 to 8 kW (not included)

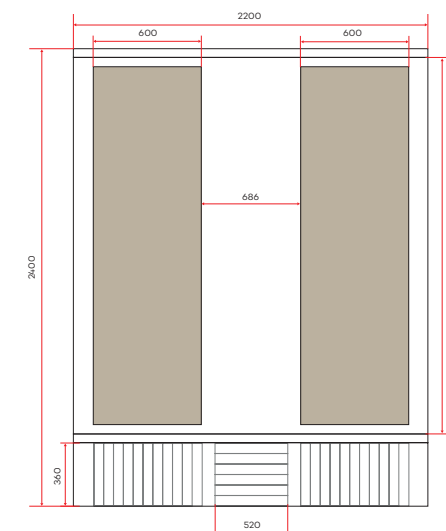



HOLL'S ACCESSORIES

NEW ARRIVALS
★ 2025

ERGONOMIC HEADREST

Ergonomic headrest that perfectly conforms to the shape of your head. Model made from high quality Aspen wood. Compatible with all saunas with room to recline.

Product code	HL-HEADREST512A
--------------	-----------------

HEADREST

Comfortable and durable headrest. Model made from high quality cedar wood. Compatible with all saunas with room to recline. Dimensions: 18x23cm

Product code	HL-HEADREST515A
--------------	-----------------

SEAT BENCH

Designed to add an extra space to your sauna or used as a side table. Made from cedar, it resists heat and moisture. Dim. 534 x 430 x 400mm

Product code	HL-BENCH520D
--------------	--------------



WOODEN SAUNA ACCESSORIES KIT

Traditional wooden sauna accessories with 2 sets: bucket (4L) + ladle, and thermometer + hourglass

Bucket + ladle	HL-ACCBOIS
Thermometer + hourglass	HL-KITSANDTHERM

STAINLESS STEEL SAUNA ACCESSORIES KIT


Traditional sauna kit made of wood and stainless steel consisting of a bucket (5L) and ladle.

Bucket + ladle	HL-ACCINOX
Thermometer + hourglass	HL-KITSANDTHERM

ONYXIA SAUNA KIT

Traditional sauna kit made of black wood and stainless steel consisting of 2 sets: bucket (4L) + ladle, and thermometer + hourglass

Bucket + ladle	HL-ACCBLK
Thermometer + hourglass	HL-KITSANDTHERMBLK

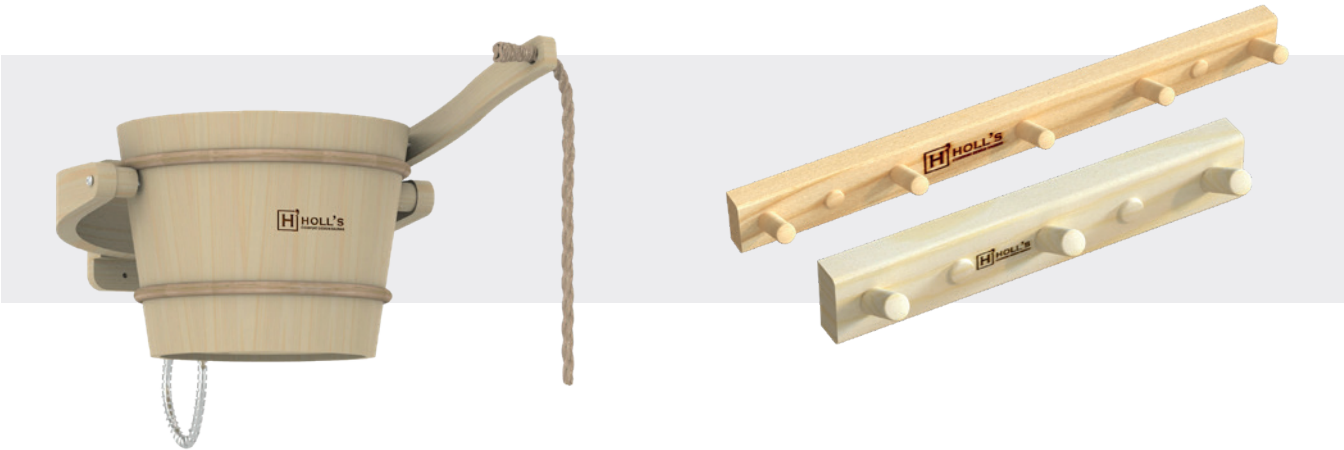

COLD SHOWER BUCKET

Cold shower wooden bucket with mounting bracket. Overflow prevention system and 18-litre capacity.

Product code	HL-PAILPINE
--------------	-------------

3 & 5-PEG WOODEN WALL HOOKS

Wooden screw-in hooks, ideal for hanging towels and bathrobes on the way in and out of the sauna or spa.

	3 pegs	5 pegs
Product code	HL-HANGER582	HL-HANGER583



INFRARED HEATED BACKREST

Ergonomic backrest with integrated infrared heater, made of high-quality aspen with adjustable headrest.

Perfect for enjoying the benefits of infrared heating wherever you go.

Wall plug included. Connect to any 220V mains socket

Product code	HL-505-A-HOLLS
--------------	----------------



VULKANO HEATERS

Electric heater with contemporary design

	VULKANO MINI COMBI	VULKANO COMBI	
Type	Electric stove		
Product code:	HL-NRMC-36NB-BL	HL-NRNC-60NB-BL	HL-NRNC-90NB-BL
Power	3.5 kW	6 kW	9 kW
Recommended volume (min. - max.)	3 - 6 m³	5 - 9 m³	8 - 14 m³
Power supply	230 V 1P / 400 V 3P		
Dimensions (LxWxH)	345 x 300 x 525 mm	400 x 385 x 610 mm	
Weight (without stones)	7 kg	9 kg	9 kg
Max. capacity	10.5 kg	22 kg	22 kg
Position	Mural		
Control unit (not included)	HL-SAU-B-CF-V2: classic control unit or HL-INC-SET-V2: control unit with remote control		
Warranty	2 years		

HARVIA ACCESSORIES



HELMI ACCESSORY KIT

Harvia Kit made of recycled materials with bucket, ladle and hourglass.

Colour	Terracotta	Ivory	Chocolate
Product code	SN-SA010R	SN-SA010V	SN-SA010B



ACCESSORY KIT

Harvia plastic kit consisting of bucket and ladle.

Black
SN-SA009



Stainless steel ACCESSORY KIT

Stainless steel bucket and ladle with thermometer and hygrometer.

structure	Black
SN-SA006	SN-SA007



HARVIA LEGEND METAL BASKET

Storage basket for wood with high-end design. Made for outdoor sauna with wood burning heater. High quality metal base and wooden handle.

Product code	SN-SASPO102
--------------	-------------



HARVIA STONE

Stones for electric or wood burning heater (20kg)

	Ø 5-10 cm	Ø 10-15 cm
Product code	SN-AC-ROCK	SN-AC3020



WATERPROOF BLUETOOTH SPEAKER

Connect to this speaker for relaxing music. Waterproof and heat resistant (up to 65 °C) loudspeaker. 1800 mAh battery, ~8h battery life. USB charging (5 V CC / 0.5 A).



SET OF ESSENTIAL OILS

Set of 4 vials of essentials oils (100ml) for sauna & hammam. This box set contains the following fragrances: Finnish sauna, Eucalyptus, Cedar wood and Cherry Blossom.

Product code	HL-KIT-HUILE1
--------------	---------------



REMOTE CONTROL UNIT

Available on quotation

Remote control
WiFi Product code: SN-HARVIA-CX170WIFI

Control unit
Product code: SN-HARVIA-CX110

ELECTRIC HEATERS



Vega



Wall black steel



Glow



Glow Corner

	VEGA				WALL BLACK STEEL			GLOW		GLOW CORNER	
Type	Electric stove				Electric stove			Electric stove		Electric stove	
Product code SN-HARVIA-	PO35	PO45*	PO60*	PO80*	SW45*	SW60*	SW60*	TRT70	TRT90	TRC70	TRC90
Power	3.5 kW	4.5 kW	6.0 kW	8.0 kW	4.5 kW	6.0 kW	8.0 kW	6.8 kW	9 kW	6.8 kW	9 kW
Recommended volume (min. - max.)	1 - 4.5 m³	3 - 6 m³	5 - 8 m³	7 - 12 m³	3 - 6 m³	5 - 8 m³	7 - 12 m³	6 - 10 m²	10 - 14 m²	6 - 10 m²	8 - 14 m²
Power supply	230 V 1P / 400 V 3P				230 V 1P / 400 V 3P			230 V 1P / 400 V 3P		230 V 1P / 400 V 3P	
Dimensions (LxWxH)	280 x 295 x 505 mm	480 x 310 x 540 mm			430 x 260 x 700 mm			364 x 364 x 1076 mm		330 x 330 x 1100 mm	
Weight (without stones)	7 kg	11 kg			11 kg	12 kg	14 kg	15 kg		16 kg	
Max. capacity	12 kg	20 kg			20 kg			80 kg		50 kg	
Position	Mural				Mural			On the ground		On the ground	
Control panel	Built-in				Built-in			Built-in		Built-in	
Warranty	2 years										

* HARVIA remote control available.

WOOD BURNING HEATER

Exclusively for Gaia Nova, Onyxia Cube & Onyxia Barrel outdoor saunas.



PROTECTION

Product code: SN-HARVIA-PROTECM3-WL100



WOOD BURNING HEATER

Product code: SN-HARVIA-M3



CHIMNEY

Product code: SN-KIT-CHEM-HARVIA



HEATER GUARD

Product code: SN-HARVIA-WL450

CHIMNEY + WOOD BURNING HEATER + PROTECTION KIT

Product code: SN-HARVIA-M3-KIT

EXTRA OPTIONS

POOLICAN - FIRE PROTECTION WATER PUMP -
SHOWERS - AQUAFITNESS



Poolican



PoolSam



Outdoor showers



Aquafitness





Poolican®

NEW EDITION

THE CONNECTED 4-IN-1 POOL MANAGER!

POOL
<25 m³



- 

Built-in reversible Full Inverter heat pump
- 

Remote control
- 

All-in-one pool equipment
- 

Above-ground & in-ground pools up to 25m³
- 

Adjustable lighting

The Poolican combines the three essential components required for clear and healthy water: a **circulation pump**, an efficient **cartridge filter**, and a **salt chlorinator** for disinfection. And now Poolex is going one step further by integrating the 4th essential component for your comfort: a **reversible Full Inverter heat pump** to ensure your bathers always enjoy the perfect water temperature.

WARRANTY
• **2 years:** Poolican

POOL EQUIPMENT ROOM 2.0

- 
EASY TO MAINTAIN
Automatic water circulation adjustment
- 
CRYSTAL-CLEAR WATER
Powerful cartridge filter system
- 
BALANCED AND HEALTHY WATER
Automatic salt water chlorination treatment
- 
IDEAL TEMPERATURE THROUGHOUT THE ENTIRE SEASON
5kW Full Inverter & reversible heat pump
- 
NEW LIGHTING CONTROL

GENERAL SPECIFICATIONS	
Product code	PC-POOLICAN-2GD
Pool volume	25 m ³
Power supply	220-240V-50 Hz
Max. output	1.25 kW
Connectors	1"1/2 + 32 / 38 mm
Product dimensions	805 x 405 x 595 mm
Noise level at 10m	≤ 28 dB
LED lighting	12V DC 60 W
Warranty	2 years

CIRCULATION	
Flow rate	5.5 m ³
Power	140 W

FILTRATION	
D127 x H235 antibacterial filter	
Pureflow optional extra	

NEW FILTER PUMP

- HIGHER FLOW RATE
- LESS NOISE
- LESS POWER CONSUMPTION



- Included**
Kit for in-ground pools
- 

PREFILTER
- 

CHECK VALVE

5KW HEAT PUMP		
Air 26°C / Water 26°C	Capacity	5 kW
	Power consumption (W)	0.91 kW
	COP	5.5
Temperature range		15 / 40°C
Operating range		-7 / 43°C
Refrigerant		R32
Compressor type		Rotary
Functions		Heating / Cooling / Auto

SALT CHLORINATOR	
Salinity	3.5 g/l
Max. production level	5 g/l
Cell cleaning	Polarity inversion
Operating modes	2 modes: normal and boost



Poolsam

FIRE EXTINGUISHING WATER PUMP



4 hours runtime



Pressure: 7 bar



Capacity: 16m³/h



No need for electricity

Pool Sam is an **emergency device** that uses **your swimming pool water to extinguish small fires or contain a fire** while you wait for the fire brigade. The average volume of a swimming pool is equal to **4 or 5 Canadairs**, a not inconsiderable quantity to have on hand while waiting for the fire brigade.

WARRANTY

• **2 years:** Poolsam



DRAINAGE PUMP IN CASE OF FLOODING

In moments of crisis, such as when you need to drain a flooded room, Pool Sam proves to be a invaluable ally. Its versatility makes it the ideal partner for disaster management.

FIRE HOSE

Hand-held hose with adjustable jet and flow rate



ATTACK MODE



DEFENCE MODE

This fire hose has two operating modes:

- **Attack:** the water jet is straight and uses a lot of water, required to prevent the fire from spreading.
- **Defence:** the water jet is wider and more dispersed, providing protection against heat and smoke.

Product code	PS-POOLSAM1
Capacity	16 m³/h
Water jet reach	Up to 25m
Combustion engine	4-stroke 7 hp
Positions of use	2 modes Attack / Defence
Weight	45 kg
Pressure at pump outlet and after 25m of hose	7 bar

- **Wide coverage area:** protects up to 50m around the pool.
- **4-stroke 7 hp combustion engine:** up to 4 hours runtime with a capacity of 16m³/h, it can be used during power outages.
- **Dual-function fire hose:** attack mode to fight incipient fires and defence mode to protect against smoke.





Dada Più

THE BRAND'S
FLAGSHIP MODEL



40-litre capacity



Aluminium shower



Hybrid technology



Integrated hand-held shower head

Poolex is re-releasing its flagship model, the Dada Più. It combines Poolex's **hybrid technology** with a **40-litre capacity**, ensuring warm showers powered by solar energy **regardless of the number of users**. The high quality finish of its stainless steel mixer taps, adjustable shower head and hand shower make this an exceptional addition to your space.

WARRANTY
• **2 years:** Dada Più




Rain effect integrated shower head



Hot / Cold mixers and diverters



Chrome hand-held detachable shower head

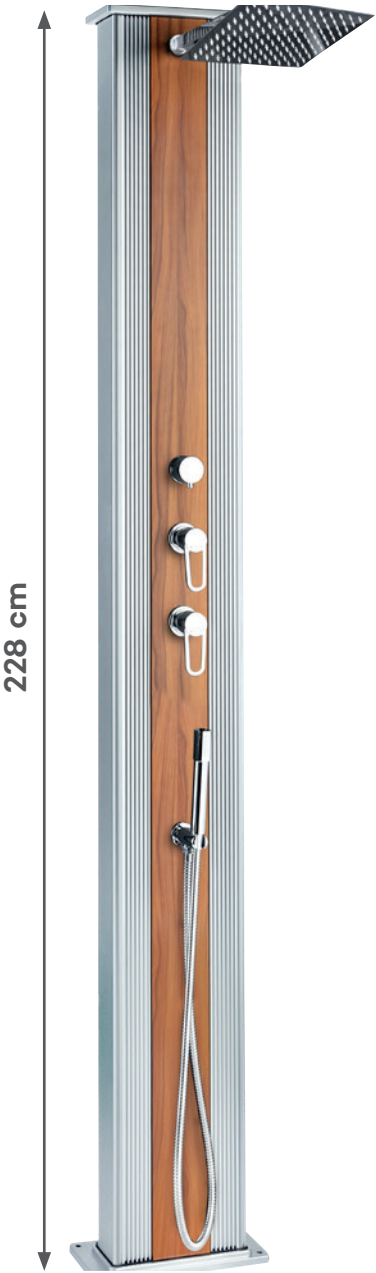

228 cm

HYBRID TECHNOLOGY

Poolex's hybrid technology lets you enjoy hot showers all year round, whatever the weather.

Solar connection: connect the shower to a cold water supply, naturally heated by the sun.

Domestic hot water connection: add a hot water supply for optimum comfort in all seasons.

Both systems can be used independently for maximum flexibility.



Solar water heater



Domestic hot water



Product code	DS-D463AW
Materials	Aluminium
Weight	10 kg
Height	228 cm
Storage capacity	40 L
Base dimensions	14 x 32.4 cm
Mounting kit	Included
Warranty	2 years



Dada Straight

TIMELESS
DESIGN



40-litre capacity



Aluminium shower



Hybrid technology



Integrated hand-held shower head

Poolex is re-releasing its flagship model, **the Dada**. Available in both straight and curved versions, it combines **Poolex's eco-friendly solar technology** and 40-litre capacity with a hot water supply to ensure that hot showers are available regardless of the number of users.




Rain effect integrated shower head



Laser-engraved chrome mixer tap

Product code	DS-D463NX	DS-D463AX
Materials	Aluminium	
Weight	10 kg	
Height	228 cm	
Storage capacity	40 L	
Base dimensions	14 x 32.4 cm	
Mounting kit	Included	
Warranty	2 years	

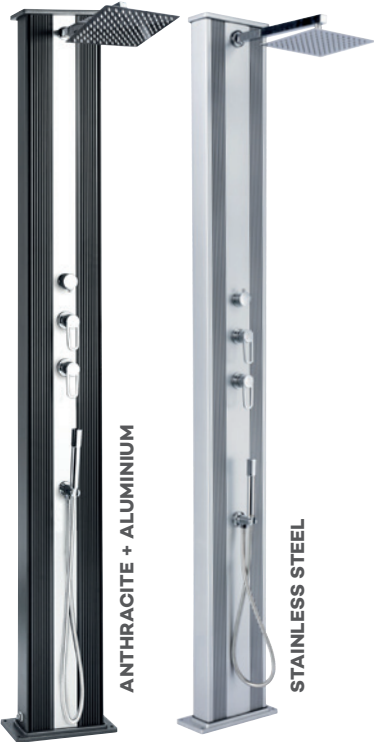

WARRANTY
• 2 years: Dada Straight



Dada Curve

REFINED CURVES AND
DISCREET ELEGANCE



40-litre capacity



Hybrid technology



Curved design



Aluminium shower

Also available in a curved version, **the Dada Curve features soft curves and an extra-flat, mirror-effect square showerhead**. Its sleek curve allows it to blend naturally into any garden and adds a designer touch.



Rain effect integrated shower head



Laser-engraved chrome mixer tap

Product code	DS-D363NO	DS-363NX
Materials	Aluminium	
Weight	10 kg	
Height	228 cm	
Storage capacity	40 L	
Base dimensions	14 x 32.4 cm	
Mounting kit	Included	
Warranty	2 years	



WARRANTY
• 2 years: Dada Curve



Jolly Go
SOLAR SHOWER &
GARDEN TAP



20-litre capacity



Aluminium shower



Solar energy



Detachable hand-held shower head

The Jolly Go solar shower will delight anyone looking for a discreet yet high capacity and practical solar shower.

Featuring a thermo-lacquered aluminium tower, **available in 6 colours**, the Jolly Go is equipped with a foot-rinse, a mixer and a hand shower with hose for an easy body rinsing without wetting the hair.

WARRANTY


• 2 years: Jolly Go



Discreet and elegant



Foot-rinse equipped with Gardena® 25 mm connector for watering your garden

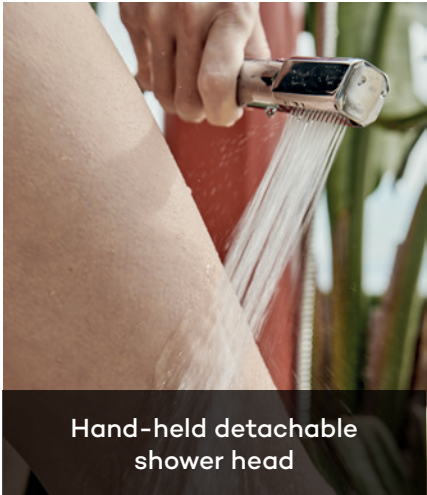

Hand-held detachable shower head

Product codes	DS-JG141-6011	DS-JG141NX	DS-JG141-6027	DS-JG141-3016	DS-JG141NO	DS-JG141-5019
Colours	Reseda green	Aluminium	Opaline green	Terracotta	Anthracite	Capri blue
Materials	Aluminium					
Weight	5.5 kg					
Height	120 cm					
Capacity	20 L					
Base dimensions	16 x 18 cm					
Mounting kit	Included					
Warranty	2 years					



Spring
LIGHTWEIGHT
& STYLISH DESIGN



30-litre capacity



Solar energy



Foot-rinse
included



Elegant &
timeless design

The **Spring solar shower** in aluminium blends in perfectly with any outdoor space. Its **30-litre reservoir is naturally heated by the sun**, providing a 100% environmentally friendly solution. **Elegant and lightweight**, it can be easily connected to any water supply.



Available in 4 colours



Rain effect integrated
shower head

Product code	DS-A122BN	DS-A122NO	DS-A122NX	DS-A122RS
Colours	Anthracite + stainless steel	Anthracite	structure	Pink
Materials	Aluminium			
Weight	11.5 kg			
Height	228 cm			
Storage capacity	30 L			
Base dimensions	26 x 12 cm			
Mounting kit	Included			
Warranty	2 years			



WARRANTY

• 2 years: Spring



Jolly
MODERN &
FUNCTIONAL



33-litre capacity



Solar energy



Foot-rinse
included



Easy installation

The **Jolly solar shower** will blend beautifully into any surroundings. **Made of aluminium**, this designer piece is available in 2 colours. The warmth of the sun is enough to heat the **33-litre reservoir** of the Jolly solar shower. It is therefore **completely eco-friendly**. It can easily be connected to any water supply.



Foot-rinse included



Blends in perfectly with
any outdoor space

Product code	DS-A822NO	DS-A822NX
Materials	Aluminium	
Weight	11 kg	
Height	233 cm	
Capacity	33 L	
Base dimensions	16 x 18 cm	
Mounting kit	Included	
Warranty	2 years	



WARRANTY

• 2 years: Jolly



Cobra

A UNIQUE DESIGN!



32-litre capacity



Solar energy



Foot-rinse included



Colourful & original design

A BOLD DESIGN!

A design that combines **sleek curves and reptilian detailing**. This solar shower becomes a decorative piece in its own right in your garden. **Featuring an adjustable rain effect showerhead, mixer tap and stainless steel foot-rinse station**, it's also eco-friendly thanks to its **32-litre HDPE body**, which harnesses the power of the sun to provide a warm shower.



Product code	DS-C720BL	DS-C720VE	DS-C720NO	DS-C720RS
Colours	Blue	Green	Anthracite	Pink
Materials	HD Polyethylene			
Weight	9.5 kg			
Height	217 cm			
Capacity	32 L			
Base dimensions	30 x 34 cm			
Mounting kit	Included			
Warranty	2 years			



WARRANTY

• 2 years: Cobra



So Happy

HIGH-CAPACITY
& ELEGANT



28-litre capacity



Solar energy



Foot-rinse included



Colourful & original design

A bestseller since its launch, the Happy has been reinvented as the So Happy, with **a more modern design, greater capacity and, above all, some new finishes** that make the So Happy even more attractive.



Foot-rinse included



Colourful design

Product code	DS-H221NO	DS-H221BL	DS-H221VE
Colours	Anthracite	Blue	Green
Materials	HD Polyethylene		
Weight	6 kg		
Height	216 cm		
Capacity	28 L		
Base dimensions	24 x 26 cm		
Mounting kit	Included		
Warranty	2 years		



WARRANTY

• 2 years: So Happy



Happy 4x4

HIGH CAPACITY & REFINED ELEGANCE

- 

44-litre capacity
- 

Solar energy
- 

Foot-rinse included
- 

Colourful & original design

The **Happy 4x4** solar shower has the largest capacity in the range, with a 44-litre solar heated tank that is 100% environmentally friendly. **Made from high-density polyethylene (HDPE)**, it has a curved and elegant design and is available in 4 different colours to blend in with any outdoor space. It's easy to connect and install, and its flared base ensures stability.



Product code	DS-H422NO	DS-H422BL	DS-H422VE	DS-H422RS
Colours	Anthracite	Blue	Green	Pink
Materials	HD Polyethylene			
Weight	7.5 kg			
Height	229 cm			
Capacity	44 L			
Base dimensions	26 x 29 cm			
Mounting kit	Included			
Warranty	2 years			



WARRANTY

• **2 years:** Happy 4x4



Happy Go

COMPACT HEIGHT & HIGH CAPACITY

- 

23-litre capacity
- 


Solar energy
- 

Designed to blend seamlessly into the garden
- 

Colourful & original design

COMPACT AND SOPHISTICATED!

The Happy Go solar shower combines a compact size with high capacity. Supplied with a detachable shower head, **it's simple and fun to use. 100% eco-friendly, the warmth from the sun's rays is enough to heat its 23-litre reservoir.** It can be easily connected to any water supply. Made from HDPE, the Happy Go is available in anthracite or blue.

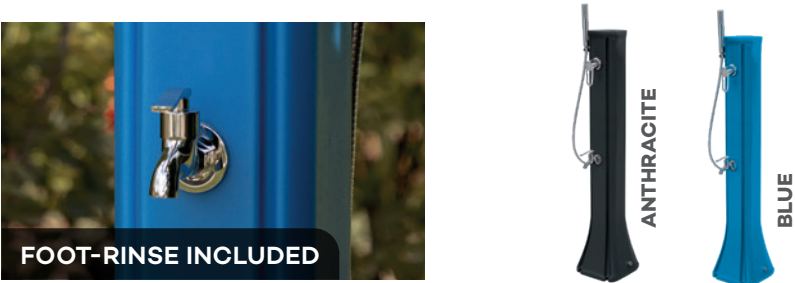

Product code	DS-HG142NO	DS-HG142BL
Colours	Anthracite	Blue
Materials	HD Polyethylene	
Weight	6.5 kg	
Height	120 cm	
Capacity	23 L	
Base dimensions	26 x 29 cm	
Mounting kit	Included	
Warranty	2 years	



WARRANTY

• **2 years:** Happy Go



Shower tray

RECYCLABLE SHOWER
TRAY DESIGNED FOR
OUTDOOR USE



Long lasting




High-quality
materials



Compatible with all
Poolex showers

Ideal before and after a swim, when returning from the beach or after a sports session, the Poolex outdoor solar shower offers a moment of relaxing refreshment. To take full advantage of the water without getting your feet wet, make sure to stand firmly on the tray when using the shower.

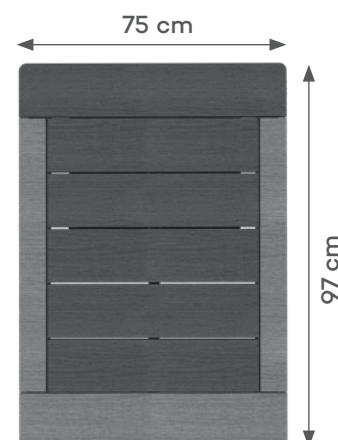

WARRANTY

• **2 years:** Shower tray

Product code	DS-BASE-GR	DS-BASE-CF
Colours	Dark Grey	Dark Coffee
Materials	High quality wood effect composite	
Dimensions	75 x 43 x 97 cm	
Warranty	2 years	



100% recyclable



UV-resistant



Withstands
temperatures from
-30°C to 70°C



Water and mould
resistant



Termite resistant



Easy to install,
no need for glue

The Poolex shower tray is a great addition to your outdoor shower. **Available in dark coffee or dark grey**, it's the perfect complement to the space you've created.

It can be quickly installed on any flat surface and provides an efficient means of water drainage. The carefully designed platform, measuring 75x97 cm, offers a stable space where you can easily rinse off.

The composite construction makes this shower tray UV resistant and able to withstand the elements. There is no need to treat it over the seasons, it will not mould or warp. You can spend more time enjoying your solar shower and less time maintaining it!



NEW ARRIVALS
★ 2025



ELLIPTICAL TRAINER

Elly air

NORDIC WALKS
IN YOUR POOL




HYDRAULIC RESISTANCE

An ingenious system of fins, based on the principle of a water mill, provides the hydraulic resistance of the Elly Air.

This mechanism generates resistance proportional to the intensity of the movement using the mixing force of the water.

As the user accelerates or increases effort, the resistance increases, providing a progressive and adaptable workout.

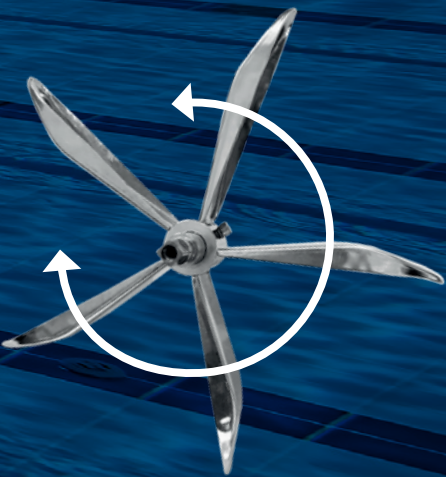

Hydraulic resistance



Aluminium body



ADS double speed pedals



Lightweight and easy to remove from the pool

The Elly aquatic elliptical trainer provides a **complete body workout** and is a popular choice for group aquatraining classes. Trainers will appreciate the ability to **work the whole body** - thighs, calves, glutes, core, arms and shoulders. Users will be seduced by its **ease of use**.

WARRANTIES

- **2 years:** Metal parts
- **6 mois:** Consumable parts

- **Aqua double speed pedals:** The large pedals have flaps that can double the surface area. The pedal position can also be adjusted.
- **Silicone wheels:** the Elly Air can be easily moved around
- **Swing arms:** The arms move in unison with the feet, keeping the whole body in sync throughout the aqua-training session.
- **Aluminium construction:** To increase corrosion resistance, the aluminium range from Waterflex is anodised to a thickness of 25 microns, i.e. Class 25, normally reserved for industrial applications.
- **White stabilising feet**

Product code	WX-ELLY-AIR
Quality	T6 aluminium alloy
Resistance	Swing arms with perforated paddles for more hydraulic resistance
Adjustable	Yes
Dimensions	118 x 56 x 179 cm (LxWxH)
Weight	23 kg
Water depth	1.10 to 1.50 m
Warranty	2 years



Falcon Air

THE SPORT+ WATER BIKE

WORKOUT TYPE:
MUSCLE BUILDING



Lightweight and easy
to remove from the
pool



Fully-equipped
Aquabike



ADS double speed
pedals



Corrosion
resistant

Our most complete aquabike

This sports version is intended for those who wish to combine cardio-training with muscle building. **It is designed for intensive use in chlorinated or salt water**, ideal for getting back into shape or aquatherapy.

WARRANTIES


- **2 years:** Metal parts
- **6 mois:** Consumable parts

AQUAPALM SYSTEM

4 INTENSITY LEVELS

Falcon Air's Aquapalm system consists of **4 blades to increase performance**. Their curved shape provides additional force against the water and increases resistance. **This hydraulic resistance system can be adjusted by the user**, even from a seated position, by rotating each blade.

FOR ALL POOLS & LIFTS

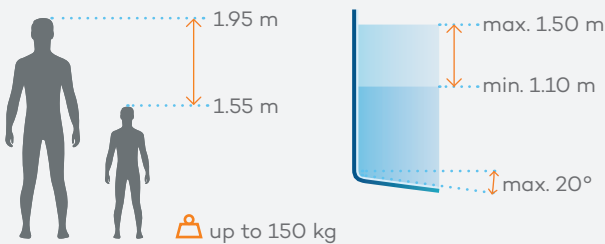

SPORT+ PACK INCLUDED



Training handlebar



Comfortable saddle




Isothermal water bottle



Bottle holder

CONFIGURATION

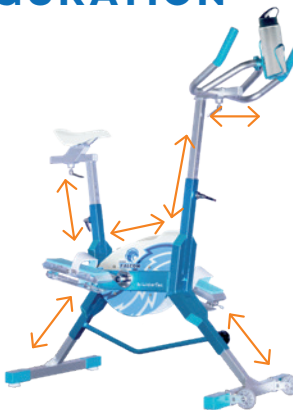

Product code	WX-FALC4A
Quality	T6 aluminium alloy
Minimum dimensions folded	L 94 x W 55 x H 116 cm
Maximum dimensions unfolded	L 122 x W 55 x H 153 cm
Weight	15.8 kg
Water depth	1.10 m to 1.50 m
Warranties	2 years for metal parts 6 months for consumable parts




Lanabike EVO

THE MOST FUN AQUABIKE
FOR HOME TRAINING

WORKOUT TYPE:
WELLNESS / FITNESS



Lightweight and easy
to remove from
the pool



Ideal for shaping
your figure



ADS double speed
pedals




Easily adjustable

The swimming pool revolution!

With the Lanabike Evo, **Waterflex is revolutionising the world of aquabiking in private pools.** The revolutionary **Aqua Double Speed pedal system provides hydraulic resistance to match the cardiovascular workout while maintaining joint health.** Equipped with an anodised aluminium structure, the Lanabike Evo is easy to use for those who want to enjoy their pool and keep fit.


WARRANTIES

- **2 years:** Metal parts
- **6 mois:** Consumable parts

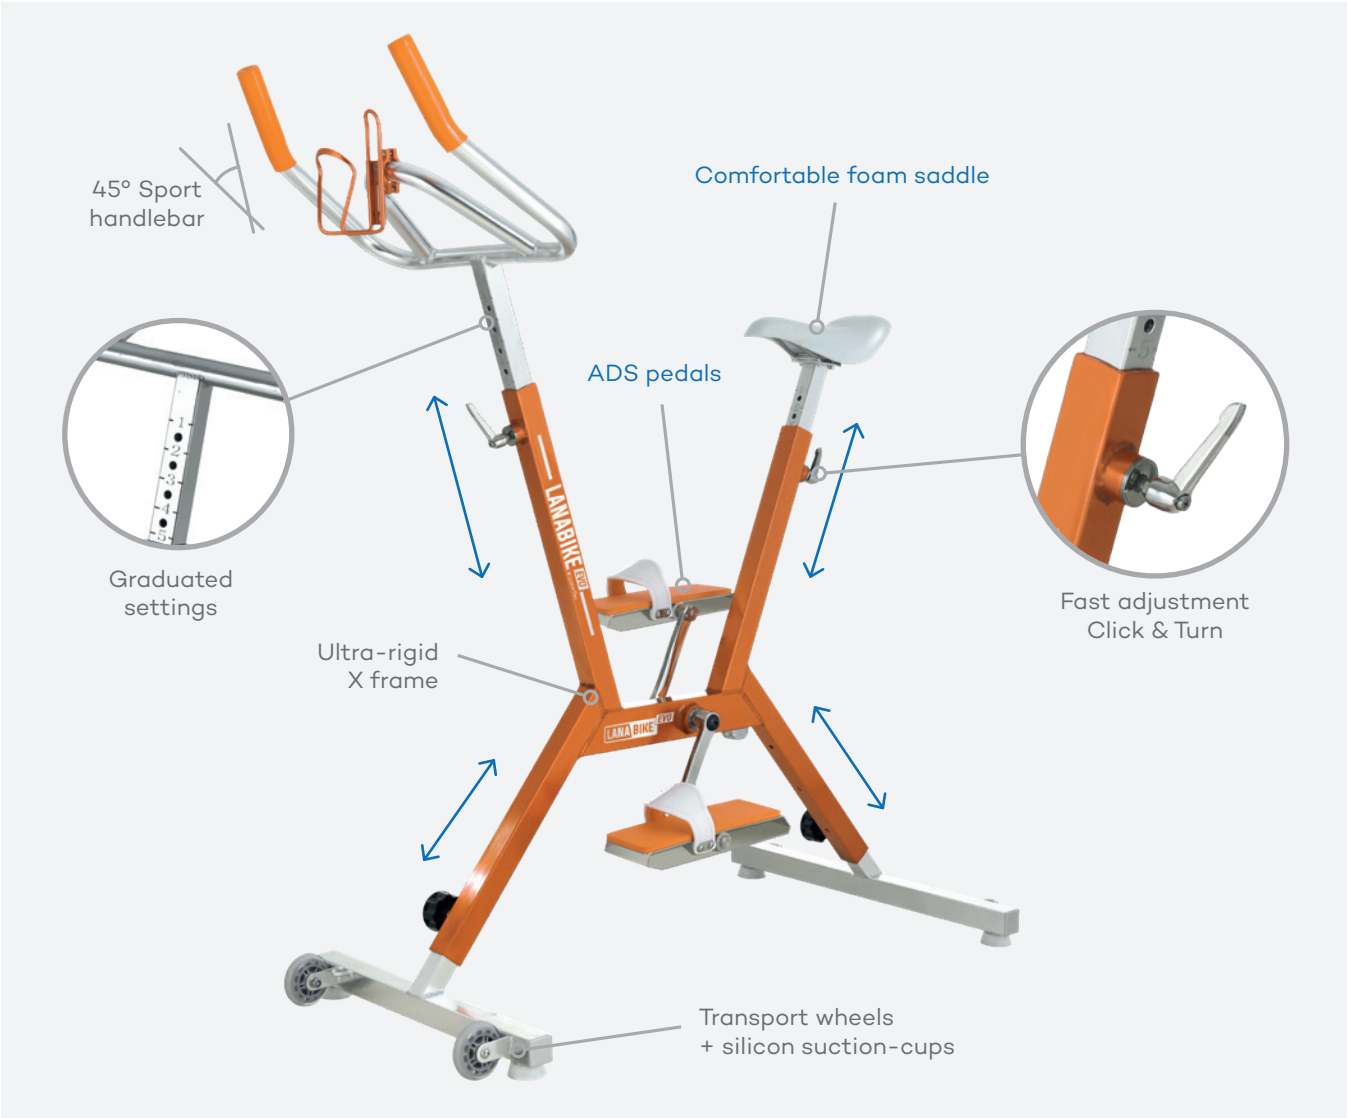


AQUA DOUBLE SPEED PEDALS

The ADS pedals are made from **aluminium** and are equipped with a hinge-mounted folding flap. These unfold and lock into place in a single gesture and **increase hydraulic resistance by 54%**. By doing so, you can make your cardio session harder.

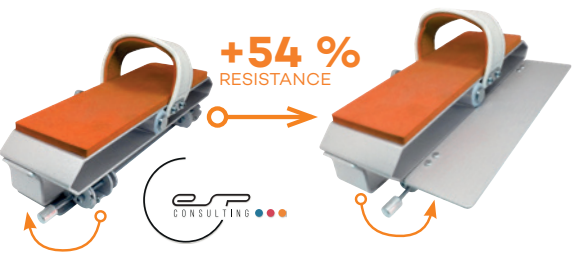


Reference	WX-LANA2-OR
Tech Aluminium	T6 aluminium alloy
Anodised	25 µm
Minimum dimensions closed	L 96 x W 55 x H 120 cm
Maximum dimensions open	L 120 x W 55 x H 164 cm
Weight	9.9 kg
Water depth	1.10 m to 1.60 m
Warranties	2 years for metal parts 6 months for consumable parts

ACCESSORIES INCLUDED

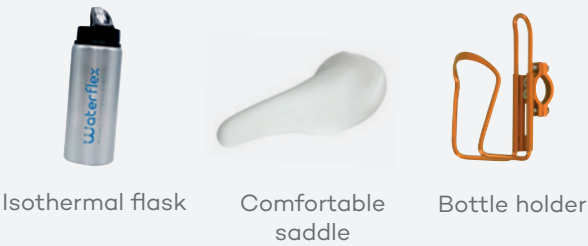

My Aqua Fit

THE CONNECTED 4-IN-1 AQUABIKE KIT!

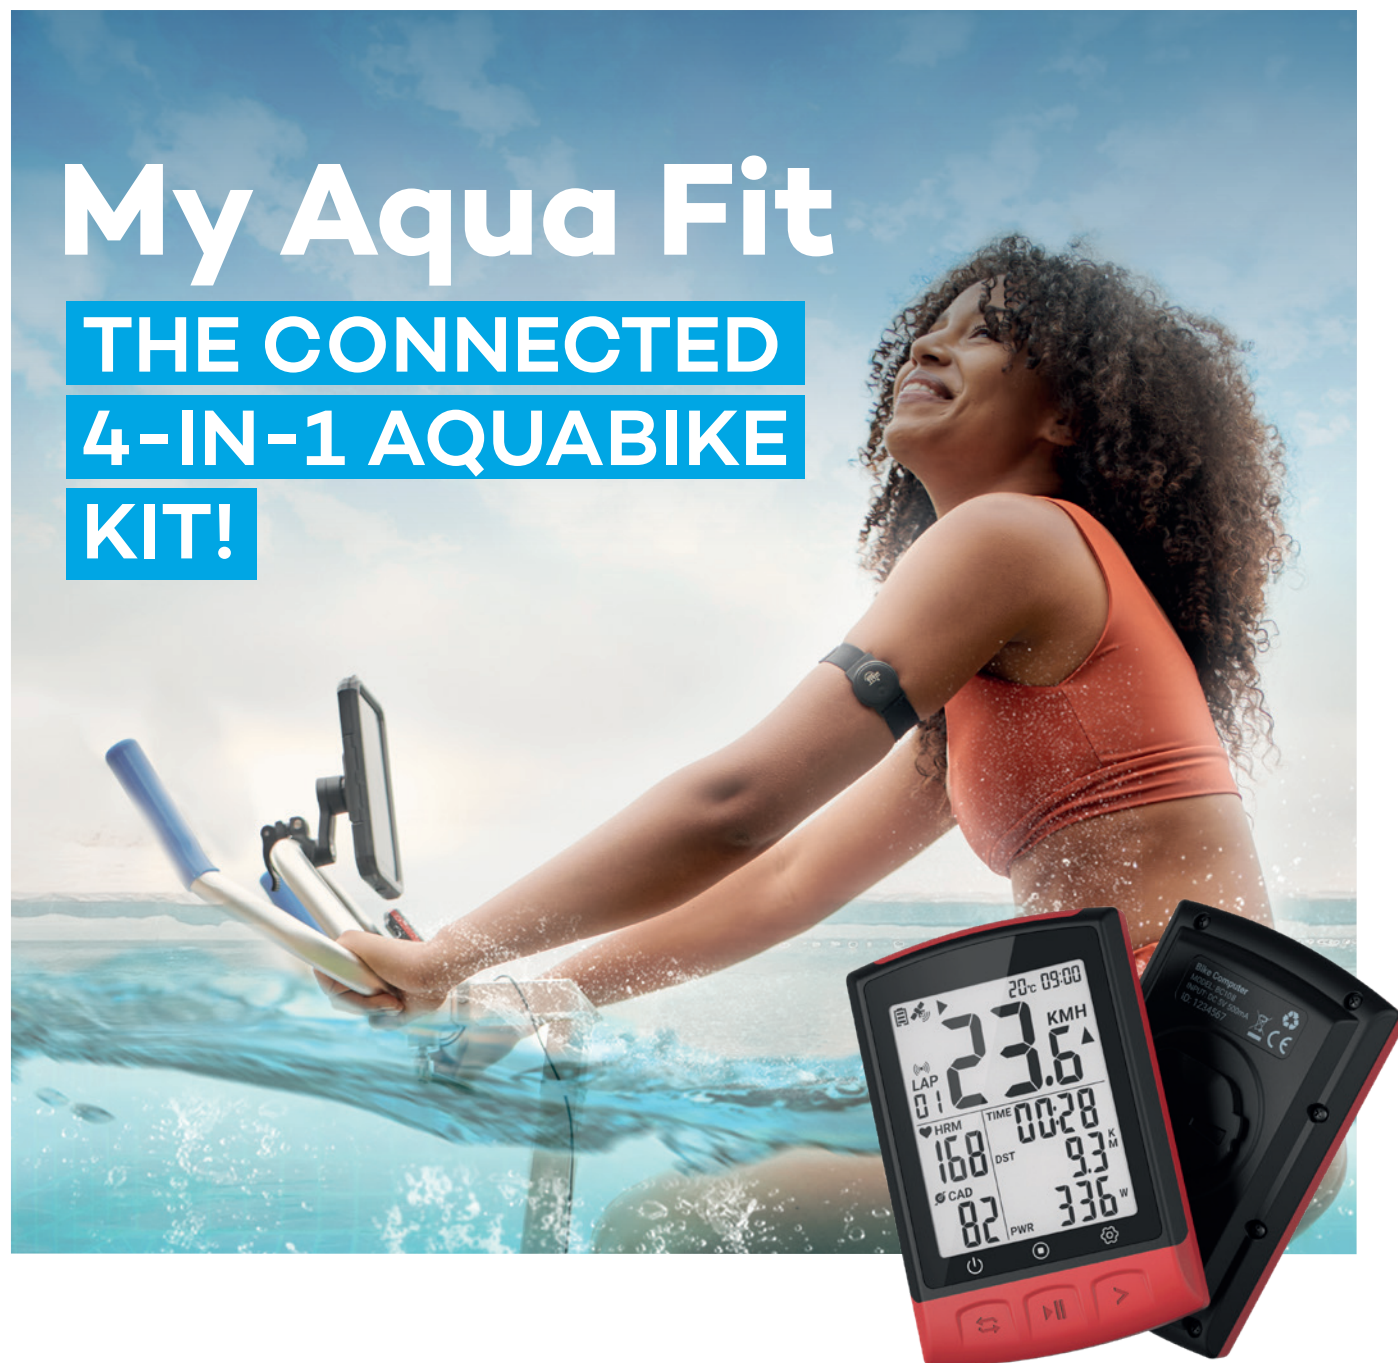

28 hours of
battery life



Waterproof
IP67



Bluetooth
5.0



Compatible with
Strava & Zwift

Track your **performance in real time** on the screen and **view your stats** in an instant. The **waterproof case** keeps your phone safe so you can race against others on **Zwift** or sync your workout with **Strava**. You can even take an Aquabike video class!

WARRANTY

• **2 years:** My Aqua Fit



CONNECTED POOL EQUIPMENT

Your Aquabike's sensor data is **stored and uploaded to your smartphone** via a waterproof wired connection using a free app.

The app lets you view your data on your smartphone or on a bike computer mounted on the handlebars. You now have information to personalize your training session.

- **Accurately track your training** to optimise performance
- **Heart rate analysis** with the heart rate monitor armband
- **Calculate calories burned** See the effectiveness of your workout
- **Compatible with Strava and Zwift apps** Share your results with your friends
- **Waterproof case** for smartphones included

INCLUDED IN THE PACK



Sensor



Armband heart rate
monitor



Bike computer



Waterproof case
for phone



POOL
& GARDEN



A wide range of heat pumps, pool equipment and outdoor showers.

RELAXATION
& WELLNESS



Collection of ice baths & acrylic, semi-rigid and inflatable spas



Aquafitness equipment.



Collection of steam, infrared and hybrid saunas.



Silverline Top - Heat pump



Scan for more info

Product code	Description
PC-TOP060	Poolex Silverline Top 60 - Full Inverter technology from 20 to 40m³ / 6.4 kW / COP 6.03 ~ 11.11*
PC-TOP090	Poolex Silverline Top 90 - Full Inverter technology from 40 to 50m³ / 8.8 kW / COP 5.89 ~ 11.11*
PC-TOP120	Poolex Silverline Top 120 - Full Inverter technology from 50 to 70m³ / 12.05 kW / COP 6.15 ~ 10.94*
PC-TOP150	Poolex Silverline Top 150 - Full Inverter technology from 70 to 90m³ / 15.81 kW / COP 6.08 ~ 11.05*
PC-TOP150T	Poolex Silverline Top 150 3-phase - Full Inverter technology from 70 to 90m³ / 15 kW / COP 5.86 ~ 11.05*
PC-TOP200	Poolex Silverline Top 200 - Full Inverter technology from 90 to 120m³ / 19.85 kW / COP 6 ~ 12.48*
PC-TOP200T	Poolex Silverline Top 200 3-phase - Full Inverter technology from 90 to 120m³ / 19.93 kW / COP 6.02 ~ 12.35*



Scan for more info

Silent Max - Heat pump

Product code	Description
PC-SLM080	Poolex Silent Max 80 Full Inverter technology from 35 to 50m³ / 7.45kW / COP 13.5*
PC-SLM125	Poolex Silent Max 125 Full Inverter technology from 50 to 70m³ / 12.3kW / COP 15.5*
PC-SLM155	Poolex Silent Max 155 Full Inverter technology from 65 to 85m³ / 15kW / COP 16.6*



* COP in Air 26°C / Eau 26°C



Scan for more info

Jetline Selection Fi - Heat pump



Product code	Description
PC-JLS075N	Poolex Jetline Selection Fi 75 Full Inverter technology from 30 to 45m³ / 7.1kW / COP 13.6*
PC-JLS095N	Poolex Jetline Selection Fi 95 Full Inverter technology from 40 to 50m³ / 9.5kW / COP 14*
PC-JLS125N	Poolex Jetline Selection Fi 125 Full Inverter technology from 45 to 65m³ / 11.9kW / COP 16.4*
PC-JLS155N	Poolex Jetline Selection Fi 155 Full Inverter technology from 65 to 80m³ / 15.3kW / COP 16.3*
PC-JLS210N	Poolex Jetline Selection Fi 210 Full Inverter technology from 80 to 110m³ / 20.1kW / COP 16.5*

While stocks last



Scan for more info

Product code	Description
PC-SLP070N	Poolex Silverline Fi 70 - Full Inverter technology from 30 to 45m³ / 6.8kW / COP 12.9*
PC-SLP090N	Poolex Silverline Fi 90 - Full Inverter technology from 40 to 50m³ / 9.5kW / COP 13.9*
PC-SLP120N	Poolex Silverline Fi 120 - Full Inverter technology from 45 to 65m³ / 11.3kW / COP 16.1*
PC-SLP150N	Poolex Silverline Fi 150 - Full Inverter technology from 65 to 80m³ / 14.5kW / COP 16.1*
PC-SLP200N	Poolex Silverline Fi 200 - Full Inverter technology from 80 to 110m³ / 19.2kW / COP 16.2*



Scan for more info

Silverline - Heat pump



Product code	Description
PC-SLP055	Poolex Silverline 55 from 20 to 30m³ / 5.39kW / COP 6.13*
PC-SLP070	Poolex Silverline 70 from 30 to 40m³ / 7.02kW / COP 6.21*
PC-SLP090	Poolex Silverline 90 from 40 to 50m³ / 9.31kW / COP 6.17*
PC-SLP120	Poolex Silverline 120 from 45 to 65m³ / 12.5kW / COP 6.22*
PC-SLP150	Poolex Silverline 150 from 65 to 75m³ / 15.24kW / COP 6.2*
PC-SLP220	Poolex Silverline 220 from 80 to 110m³ / 21.72kW / COP 6.19*

While stocks last



Mag Fi - Heat pump



Scan for more info

Product code	Description
PC-MAG040FI	Poolex Mag Full Inverter 4kW - up to 28m³ / COP 12.5*
PC-MAG050FI	Poolex Mag Full Inverter 5kW - up to 35m³ / COP 12.5*



Mag R - Heat pump



Scan for more info

Product code	Description
PC-MAG030	Poolex Mag 3 kW - up to 21m³ / COP 5.5*
PC-MAG040	Poolex Mag 4 kW - up to 28m³ / COP 5.5*
PC-MAG050	Poolex Mag 5 kW - up to 35m³ / COP 5.8*



CONSIDER CARRYING OUT A THERMAL ANALYSIS

The water heating capacities specified for our pool heat pumps are maximum estimates for information purposes only, based on favourable conditions and geography. To ensure optimum efficiency, it is essential to carry out an accurate thermal analysis to determine the exact power required according to the characteristics of each installation.

NEW ARRIVALS
★ 2025



Scan for more info

Onduline - Multi-speed pump

WARRANTY
2 YEARS

Product code	Description
PF-OL15	Poolex Onduline filtration pump - 1.5 horsepower with RCD plug



Scan for more info

Tonicline - Fixed-speed pump

WARRANTY
2 YEARS

Product code	Description
PF-TNC050	Poolex Tonic 0.5 hp - 220V/50Hz
PF-TNC075	Poolex Tonic 0.75 hp - 220V/50Hz - Max. flow rate 11 m³/h
PF-TNC100	Poolex Tonic 1 hp - 220V/50Hz - Max. flow rate 17 m³/h
PF-TNC150	Poolex Tonic 1.5 hp - 220V/50Hz - Max. flow rate 19 m³/h



Robotic pool cleaner



Scan for more info

Product code	Description
RO-PANTHER1	Red Panther automatic pool cleaner - Pools up to 100m²

WARRANTY
2 YEARS



Filtration unit - Blue Silk



Scan for more info

Product code	Description
JL-P11358FR	3m³/h filtration unit (filter + circulation pump)

WARRANTY
2 YEARS



Filter Max - Filtration unit



Scan for more info

Product code	Description
PF-FILMAX04	Poolex Filter Max - Tank Ø250mm - 4.8m³/h / 80W
PF-FILMAX06	Poolex Filter Max - Tank Ø250mm - 6.8m³/h / 140W
PF-FILMAX08	Poolex Filter Max - Tank Ø400mm - 8m³/h / 250W
PF-FILMAX10	Poolex Filter Max - Tank Ø400mm - 10m³/h / 400W

WARRANTY
2 YEARS



Optimax



Hose



3-way valve



Hose clamp

Filter Max accessories

Product code	Description
PF-OPTIBALL700C	Optimax Balls - 700g (equivalent to 25kg of sand)
PF-OPTIMAXC	Ball cartridge 100g - Type A purifier replacement
PF-FILTERTUYAU8	Universal replacement hose 8m - Can be cut to size - Ø38mm - Intex/Bestway compatible
PF-FILTERVANNE3	3-way stop valve (compatible with Intex/BW/Ø50mm)
PF-FILTERCOLLIER32	Set of 2 universal hose clamps Ø32mm
PF-FILTERCOLLIER38	Set of 2 universal hose clamps Ø38mm



Scan for more info



Scan for more info

Sand filter - Opti

WARRANTY
EXCLUDING SEALS - CAPS
2 YEARS
WARRANTY
TANK
5 YEARS

Product code	Description
Opti Top	
PF-OPT450T	Poolex OPTI TOP - P450 - Ø18" - Valve 1"1/2 / 50mm - Max. flow rate 7.8 m³/h
PF-OPT500T	Poolex OPTI TOP - P500 - Ø21" - Valve 1"1/2 / 50mm - Max. flow rate 10.8 m³/h
PF-OPT650T	Poolex OPTI TOP - P650 - Ø25" - Valve 1"1/2 / 50mm - Max. flow rate 15.3 m³/h
Opti Side	
PF-OPT450S	Poolex OPTI SIDE - SP450 - Ø18" - Valve 1"1/2 / 50mm - Max. flow rate 7.8 m³/h
PF-OPT500S	Poolex OPTI SIDE - SP500 - Ø21" - Valve 1"1/2 / 50mm - Max. flow rate 10.8 m³/h
PF-OPT650S	Poolex OPTI SIDE - SP650 - Ø25" - Valve 1"1/2 / 50mm - Max. flow rate 15.3 m³/h
PF-OPT700S	Poolex OPTI SIDE - SP700 - Ø28" - Valve 1"1/2 / 50mm - Max. flow rate 19.2 m³/h


Single-cartridge filter - Netflux

WARRANTY
EXCLUDING SEALS - CAPS
2 YEARS
WARRANTY
TANK
5 YEARS

Product code	Description
PF-NFX025	Poolex Netflux Single-cartridge filter - 2.25m³/h / Max. flow rate 5.5 m³/h
PF-NFX050	Poolex Netflux Single-cartridge filter - 4.63m³/h / Max. flow rate 11.4 m³/h
PF-NFX075	Poolex Netflux Single-cartridge filter - 7m³/h / Max. flow rate 17 m³/h
PF-NFX100	Poolex Netflux Single-cartridge filter - 9.40m³/h / Max. flow rate 22.9 m³/h
PF-NFX025CT	Cartridge for NFX025 filter
PF-NFX050CT	Cartridge for NFX050 filter
PF-NFX075CT	Cartridge for NFX075 filter
PF-NFX100CT	Cartridge for NFX100 filter



Scan for more info



Mutli-position
bracket included

Salt chlorinator - Poolex Turbo Salt

WARRANTY
3 YEARS

Product code	Description
CL-TS100	Poolex Turbo Salt chlorinator up to 10m³
CL-TS200	Poolex Turbo Salt chlorinator up to 20m³
CL-TS300	Poolex Turbo Salt chlorinator up to 30m³
CL-TS400	Poolex Turbo Salt chlorinator up to 40m³
CL-TS600	Poolex Turbo Salt chlorinator up to 60m³
CL-TS800	Poolex Turbo Salt chlorinator up to 80m³
Replacement cells	
CL-TS100L	Replacement cell for Poolex Turbo Salt TS100
CL-TS200L	Replacement cell for Poolex Turbo Salt TS200
CL-TS300L	Replacement cell for Poolex Turbo Salt TS300
CL-TS400L	Replacement cell for Poolex Turbo Salt TS400
CL-TS600L	Replacement cell for Poolex Turbo Salt TS600
CL-TS800L	Replacement cell for Poolex Turbo Salt TS800
Accessories	
CL-TSLFIX	Mounting bracket for Poolex Turbo Salt / Sel-In chlorinator
CL-POOLTERRE50	Pool-Earth - Kit for grounding PVC D50 pipe
CL-TSLCAP	End cap for performing maintenance on Poolex Turbo Salt / Sel-In chlorinator
CL-TSLTUBE	Winter cover for Poolex Turbo Salt / Sel-In chlorinator

Delivery costs for chlorinator and cell 17 € / Accessories: 12 €



Aquabikes



Scan for more info

Product code	Description
Aquabike with aluminium frame	
WX-WRMAX1	WR MAX - Aquabike aluminum
WX-WR3A	WR3 AIR - Aquabike aluminum
WX-WR4A	WR4 AIR - Aquabike aluminum
WX-WR5A	WR5 AIR - Aquabike aluminum
Aquabike with stainless steel frame	
WX-WR3	WR3 - Aquabike steel
WX-WR5	WR5 - Aquabike steel

WARRANTY 2 YEARS ALU
WARRANTY 2 YEARS STAINLESS STEEL
WARRANTY 6 MONTHS CONSUMABLE PARTS



Aquatraining



Scan for more info

Product code	Description
Wx Tramp water trampoline	
WX-TR4-ROND	WxTramp Premium Round
WX-TR4-HEXA	WxTramp Premium Hexagonal
WX-TR4-JBAR	Grab bar for WxTramp
Treadmill	
WX-AQUAJOGG2	Aquajogg Air - Aluminium water treadmill
WX-AQUAJOGG	Aquajogg Air - Stainless steel water treadmill
Floating exercise mat	
WX-AQUAFITMAT	AquaFitMat floating exercise mat (Attachment kit included)
WX-AQUAFM-COACH	Coaching mat for AquaFitmat

WARRANTY 2 YEARS ALU
WARRANTY 2 YEARS STAINLESS STEEL



Storage trolley for AquaFitmat

Product code	Description
WX-CARTMAT5	Storage trolley for 5 floating mats

Pool lift - Aquabike lift

Product code	Description
WX-AQUALIFT	Aquabike pool lift Aquabike Lift



ADS folding pedals



Comfortable saddle



Resistance bands




Multitraining aluminium handlebar



Sports bag

Accessories

Product code	Description
Aquabike accessories	
WX-ADSP-BL	ADS folding pedals for aquabike (set of 2) blue
WX-ADSP-OR	ADS folding pedals for aquabike (set of 2) Orange
WX-ASSP-BL02	ADS folding pedals for aquabike (set of 2) light blue
WX-AHP-RS01	Set of 2 HAPPY metal pedals - Fuschia
WX-STC-VE02	Aquabike resistance band - 2 resistance levels - Green
WX-RIDERBAR-33	Multitraining aluminium handlebar: compatible with Ino 6 Air, Ino 7 Air, Ino 8 Air, WR Max
WX-SADDLE-W3	Comfortable saddle
WX-BOTTLE-01W	Waterflex water bottle - White
WX-BOTTLE-03S	Waterflex aluminium water bottle - Silver
PS-RENOVX-125	Renov'Inox 125ml
WX-RENOVX-125	Renov'Inox pack: 1 125ml bottle + 1 sponge + 1 microfibre cloth
WX-SPORTBAG01	Sports bag Blue

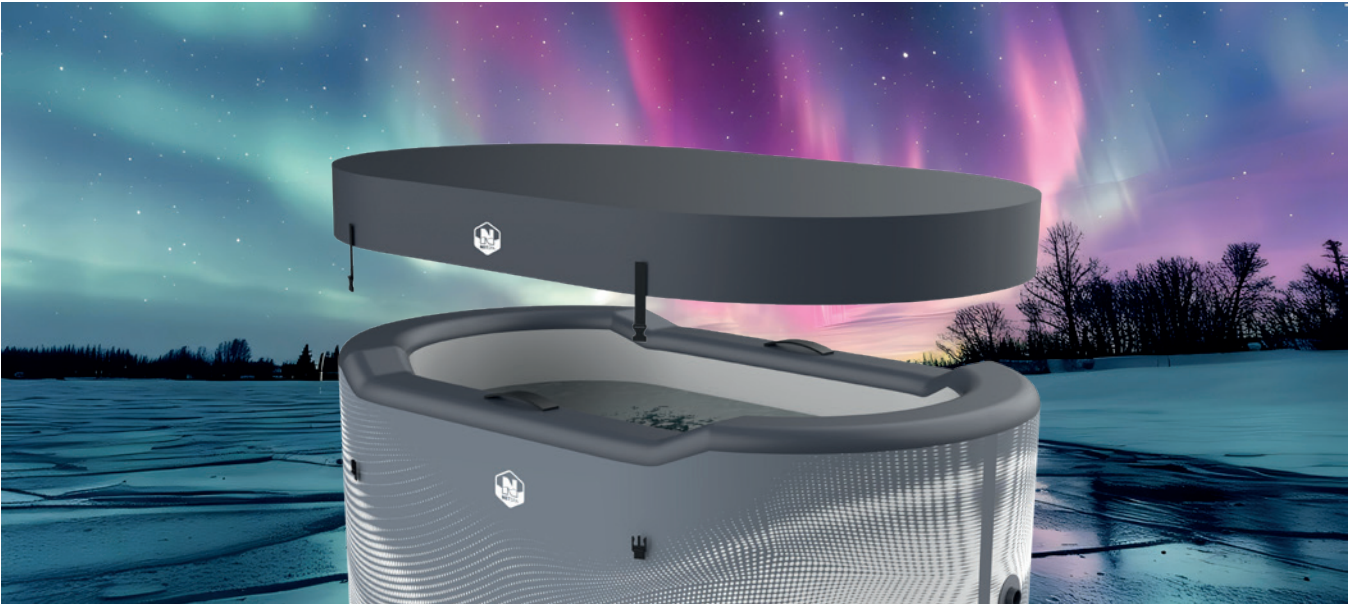

NEW ARRIVALS
★ 2025

Ice bath - Järvi



Scan for more info

Product code	Description
SP-JRV300	Ice bath Netspa Järvi (1700 x 920 x 670 mm)
SP-JRV300-CK4	Ice bath Netspa Järvi - Kit Chiller 3-40°C 4kW included

WARRANTY
2 YEARS



NEW ARRIVALS
★ 2025

Ice bath - UFC



Product code	Description
SP-UFC301	Netspa UFC ice bath (1700 x 920 x 670 mm)
SP-UFC301-CK5	Netspa UFC ice bath - Chiller kit 3-40°C 5kW included
SP-UFC250	Netspa UFC ice bath Octogon (Ø 1300 x 900 mm)+ Step
SP-UFC250-CK5	Netspa UFC ice bath Octogone + Step - Chiller kit 3-40°C 5kW included

WARRANTY
2 YEARS




Octopus with furniture



Module A



Module B



Module C




Module D



Module E



Vita Premium with furniture

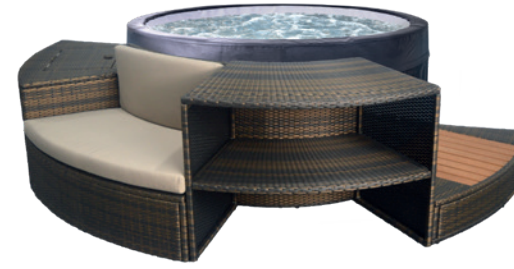

Vita with furniture

Semi-rigid spas and furniture



Scan for more info

Product code	Description
Spa Octopus - 193 x 73cm	
SP-OCT165B	NetSpa Octopus - 6 person (excluding furniture) (4 adults + 2 children)
SP-OCT165/MOB2	NetSpa Octopus + furniture (5 pieces)
SP-MOB165C-M5	Set of 5 modules A/B/C/D/E
Spa Vita - 156 x 70cm	
SP-VIP140B	NetSpa Vita 4 person
SP-VIP140/MOB2	NetSpa Vita + furniture (5 pieces)
SP-MOB140R	Set of 5 modules
Spa Vita Premium - 184 x 73 cm	
SP-VIP160B/MOB2	NetSpa Vita Premium + furniture (5 pieces)
SP-MOB160R	Set of 5 modules

WARRANTY
2 YEARS



Cantilever parasol with integrated LED lighting

Product code	Description
GD-UM2500BS	Complete parasol (base + parasol)
GD-BS600	Parasol base (only)
GD-UM2500	Parasol (only)

Cartridges and treatment



SP-N1407535



SP-N1408425

New arrivals



BACTI-STOP
SP-N1408778



JL-P14106



SP-NOXYTAB-20


Accessories



SP-N1405173



SP-NHEAD809



SP-NCUSH786



SP-N1405548



SP-N1405227



SP-CLEANER-15



SP-CLEANER-25



SP-N1405869

SP-N1405203

SP-N1405210

Spa accessories

Product code	Description
SP-N1408778	Antibacterial cartridge filters (Set of 3) for inflatable and Octopus + Vita semi-rigid spas
SP-N1408785	Antibacterial cartridge filters (Set of 3) for Vita Premium
SP-N1407535	Next generation cartridge filter (Set of 3)
SP-N1408761	Filter mounting unit with antibacterial cartridge
SP-N1405173	2 x Headrests & 1 x cup holder for inflatable spa
SP-NHEAD809	NetSpa Headrest & cup holder (2-in-1) for Octopus
SP-N1405227	Inflatable bar
SP-N1405548	Foot-rinse station
SP-N1405869	Inflatable cover for 4-person square spa - 128 x 128 cm
SP-N1414014	Inflatable cover for 4-person square spa - 135 x 135 cm
SP-N1405203	Inflatable cover for 4-person round spa - Ø 140cm
SP-N1407528	Inflatable cover for 5/6-person octagonal spa - 155x155cm
SP-NOXYTAB-20	NetSpa active oxygen treatment - 20 x 20g tablets
SP-CLEANER-15	NetSpa Cleaner - Spa vacuum cleaner
SP-CLEANER-25	NetSpa Cleaner Super Vac - Spa vacuum cleaner with telescopic handle
SP-NCUSH786	NetSpa Coussin comfortable foam seat for spa - Set of 2
JL-P14106	Pureflow cartridge filters for NetSpa spa



Sense 3 person

Sense 4 person



Sauna pack included

Woodwork warranty increasing from 4 to 7 years



Steam saunas - Sense

Harvia Vega electric heater + stones and sauna kit included (bucket + ladle + thermometer and hygrometer)



Scan for more info

Product code	Description
SN-SENSE-3PK	SENSE 3 traditional sauna - 3.5 kW - 3 person - Dim. 153 x 110 x 190 cm
SN-SENSE-4PK	SENSE 4 traditional sauna - 4.5 kW - 4 person - Dim. 150 x 150 x 200 cm



Zen 2 person

Zen 3 person

Zen 3/4 person

Zen 4 person

Woodwork warranty increasing from 4 to 7 years



Steam saunas - Zen

Harvia Vega electric heater + stones and sauna kit included (bucket + ladle + thermometer and hygrometer)



Scan for more info

Product code	Description
SN-ZEN2PK	ZEN traditional sauna - 3.5 kW - 2 person - Dim. 120 x 110 x 190 cm
SN-ZEN3PK	ZEN traditional sauna - 3.5 kW - 3 person - Dim. 153 x 110 x 190 cm
SN-ZEN3CPK	ZEN traditional sauna - 4.5 kW - 3 corner seats - Dim. 150 x 150 x 200 cm
SN-ZEN4PK	ZEN traditional sauna - 6 kW - 4 person - Dim. 198 x 174 x 200 cm



2 person

2/3 person

3 persons

3/4 person

Infrared saunas - Apollon - QUARTZ TECHNOLOGY

Woodwork warranty increasing from 4 to 7 years



Scan for more info

Product code	Description
SN-APOLLON-Q2	APOLLON infrared sauna - 2 person - Dim. 120 x 123 x 190 cm
SN-APOLLON-Q2C	APOLLON infrared sauna - 2/3 person - Dim. 120 x 120 x 190 cm
SN-APOLLON-Q3	APOLLON infrared sauna - 3 person - Dim. 153 x 128 x 190 cm
SN-APOLLON-Q3C	APOLLON infrared sauna - 3/4 person - Dim. 150 x 150 x 190 cm



2 persons

4 persons

Infrared sauna - Spectra - DUAL HEALTHY TECHNOLOGY

Evolution of the woodwork warranty from 4 to 7 years



Scan for more info

Product code	Description
SN-SPECTRA03R	Spectra Infrared Sauna - 2 person - Dim. 140 x 125 x 200 cm
SN-SPECTRA05R	Spectra Infrared Sauna - 4 person - Dim. 185 x 200 x 200 cm

While stocks last